Fan Coil Units

Product Catalogue 2026

Fan Coil Units are a highly efficient means of turning a water chiller, heat pump or hot water boiler into an efficient, quiet air conditioning system. These units are an effective solution to provide a comfortable environment for both commercial and residential applications. Daikin offers a wide range of Fan Coil Units for both concealed and exposed applications. Three models are available in flexible application. The only moving part in the units is the fan, making them ideal for use in offices, hotels and at home. The goal is to obtain the right solution, both technically and aesthetically.

Fan coil units

Why choose Daikin fan coil units? 4

Products overview 10

Closed protocol cassette 14

- FWC-BT/BF 14
- FWF-BT/BF 15

Open protocol cassette 16

- FWF-DT/DF 16
- FWC-DT/DF 17
- FWH-AT/AF 19
- FWI-AT/AF 18

Floor standing unit 20

- FWZ-AT/AF 20
- FWV-DAT/DAF 21

Flexi type unit 22

- FWR-AT/AF 22
- FWL-DAT/DAF 23
- FWS-AT/AF 24
- FWM-DAT/DAF 25
- FWE-DT/DF 26

Ducted units 28

- FWE-FT/FF with low ESP 28
- FWP-CT/CF with medium ESP 30
- FWB-CT/CF with medium ESP 31
- FWN-AT/AF with high ESP 32
- FWD-AT/AF with high ESP 33
- FWQ-A with medium ESP 34

Wall mounted unit 34

- FWT-HT 35

Control Systems Solutions 36

- Smart Control System 37
- Shinka 40

Options & accessories - Fan coil units: Panels and Controls 42

Why choose Daikin fan coil units?

As more buildings undergo renovation, the need to be able to deliver high indoor air quality in a specific space in an **efficient and cost-effective way** without having to do a radical re-fit of the entire HVAC system has made fan coil technology an obvious solution. Daikin has a full capacity range of **aesthetically pleasing** fan coil units with advanced controls that reliably deliver **excellent comfort levels.** And by using a refined range of advanced DC fan motors, we are able to offer flexibility while maintaining very low noise levels.

Why choose Daikin fan coil units?

- The new brushless DC ranges reflect Daikin's commitment to developing highly efficient fan coil units that help to reduce energy consumption, without compromising on reliability and performance.
- High level quality is written large for us and we are pleased to offer high technology solutions to the market.

Benefits for the installer

- Reduced amount of sizes: less stock space needed
- Modular designs for multiple configurations
- Easy integration in BMS system via modbus protocol

Benefits for the consultant

- Best solution in the market in order to have top efficiency, best comfort and lowest sound levels
- Product flexibility: wide range of options, accessories and controls

Benefits for the end user

- High comfort level
- Up to 70% savings on running costs with a BLDC fan motor
- Controller with timer programmed operating mode
- Shinka controller can satisfy all customer requirements in terms of FCU management

New generation web-based fan coil selection software

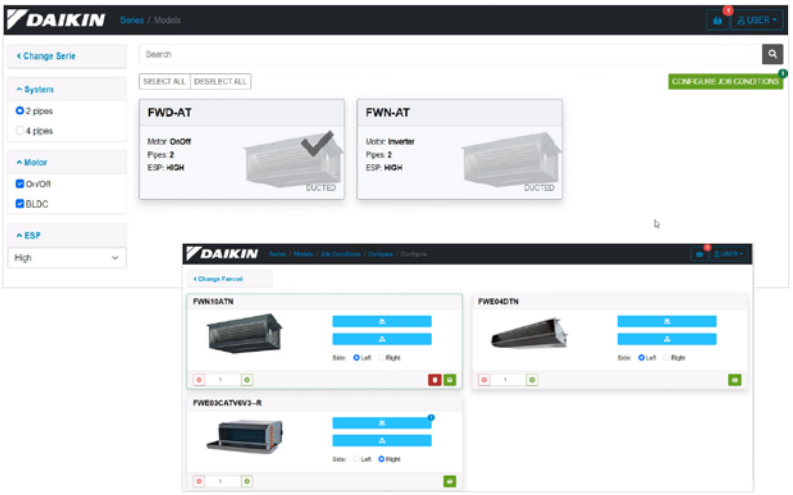

Select your FCU via our new web-based selection software:

- Selection logic is based on the performance conditions requested and filtered by the user
- The unit is completely configurable by the user with all the options/ accessories available
- A modular report with certified technical specifications and project summary can be printed

BIM objects

Our Fan Coils units are available as BIM objects in Revit format, which means they can be used in Autodesk REVIT MEP and in AutoCAD 2D files.

Visit our **BIM Application Suite**

BLDC fan motors Video

Learn more on the advantages of BLDC fan motors in Fan coil units:

- Higher efficiency than AC motor
- High comfort level
- Low sound levels
- High flexibility level

YouTube

www.youtube.com/
DaikinEurope

Expanded FCU Controller Lineup

FWEC2T/4T/10
Simplified electronic controller

Wired on-wall controller available in 3 models:

- 2 pipe
- 4 pipe
- BLDC (with automatic speed function)
- 230 V ON-OFF valve control (cooling/heating)
- Dedicated temperature probe and on-board mounting kit

FWQ-A

New MSP duct unit

BLDC fan motor for ducted applications

Performance & Features

- DIP Switch that allows the selection of the optimum fan speed according to the ESP without airflow dropping.
- Integrated DC drain pump as standard.
- Sub-drain pan provided as a standard.
- The side of the water connection can be changed on site.
- For air filters, G2 filters are standard, with G3 and G4 filters as options
- Factory Mounted valves and optional valves are supplied with special thermal insulations.

FWT-HT/HTVD

New wall mounted unit

BLDC fan motor unit for wall mounting

STREAMER

Performance & Features

- 5 different sizes from 2.4 kW to 5.3 kW
- Model with 230V ON-OFF internal 3-way valve factory mounted
- Integrated dry contact for hotel applications
- Double filtration stage (Gin-Ion filter + PM2.5 filter)
- Daikin Flash Streamer technology

Wireless remote controller ARC485B2

Wired remote controller BRC51D67

Green Building Certification:

Supporting BREEAM & LEED Standards with Daikin Fan Coil units

Daikin is committed to **reducing the environmental impact** of air conditioning through innovative, energy-efficient technologies. Our fan coil units combine flexibility, performance, and sustainability, offering ceiling, floor, or wall-mounted solutions adaptable to any building design. Engineered for precise temperature control and optimal energy use, Daikin FCUs ensure superior indoor comfort while supporting **BREEAM** and **LEED** Green Building standards.

	BREEAM					LEED	
Category	Management	Health & Welbeing	Energy	Waste	Pollution	Energy & Atmosphere	Indoor Environmental Quality
Credits	Up to 4	Up to 4	Up to 9	Up to 2	Up to 1	Up to 4	Up to 1

Products overview

Type	Model	Product name		Fan motor type	Capacity
Cassette	**Round flow cassette** ▪ 900 x 900 cassette ▪ 360° air discharge ensures uniform air flow ▪ Integrated fresh air intake ▪ Easy installation in corners ▪ Standard drain pump with 850 mm lift	FWC-BT/BF		BLDC	Cooling: 4.0 - 8.7 kW Heating: 4.8 - 10.6 kW
	4-way blow ceiling mounted cassette ▪ 600 x 600 cassette ▪ Integrated fresh air intake ▪ Horizontal auto swing ▪ Easy installation in corners ▪ Standard drain pump with 750 mm lift	FWF-BT/BF		AC	Cooling: 1.4 - 4.9 kW Heating: 2.3 - 5.6 kW
	Open Protocol Cassette ▪ 600 x 600 and 900 x 900 cassette ▪ BLDC motor with low energy consumption up to 75% ▪ 4-way air discharge ▪ Open protocol for control ▪ Condensate drainage pump up to 900 mm lift	FWI-AT/AF		BLDC	Cooling: 1.33 - 10.5 kW Heating: 1.49 - 12.2 kW
	Open Protocol Cassette ▪ 600 x 600 and 900 x 900 cassette ▪ ON/OFF 3-speed motor ▪ 4-way air discharge ▪ Open protocol for control ▪ Condensate drainage pump up to 900 mm lift	FWH-AT/AF		AC	Cooling: 1.70 - 9.73 kW Heating: 1.97 - 11.1 kW
	Open Protocol Cassette ▪ 600 x 600 cassette ▪ BLDC fan-motor with improved energy efficiency ▪ Possibility to choose the fully-flat design panel ▪ Standard DC drain pump with 835 mm lift ▪ Open protocol for control	FWF-DT/DF		BLDC	Cooling: 1.3 - 5.1 kW Heating: 1.56 - 5.74 kW
	Open Protocol Cassette ▪ 900 x 900 cassette ▪ BLDC fan-motor with improved energy efficiency ▪ Possibility to choose the round flow black design panel ▪ Standard DC drain pump with 835 mm lift ▪ Open protocol for control	FWC-DT/DF		BLDC	Cooling: 6.3 - 9.6 kW Heating: 6.8 - 10.7 kW
Floor standing units	**Floor standing unit** ▪ For vertical mounting ▪ Continuous air flow regulation and fan speed modulation ▪ Up to 70% energy savings ▪ Low sound levels	FWZ-AT/AF		BLDC	Cooling: 2.64 - 10.08 kW Heating: 2.46 - 11.18 kW
	Floor standing unit ▪ For horizontal or vertical concealed mounting ▪ Insulated valve packages, no extra drain pan required ▪ Fast-on connections for electrical options: no tools needed ▪ Easy maintenance	FWV-DAT/DAF		AC	Cooling: 1.46 -8.02 kW Heating: 1.90 - 10.03 kW
Flexi type units	**Flexi type unit** ▪ For horizontal or vertical mouting ▪ Continuous air flow regulation and fan speed modulation ▪ Up to 70% energy savings ▪ Low sound levels	FWR-AT/AF		BLDC	Cooling: 2.64 - 10.08 kW Heating: 2.46- 11.18 kW
	Flexi type unit ▪ For horizontal or vertical concealed mounting ▪ Insulated valve packages, no extra drain pan required ▪ Fast-on connections for electrical options: no tools needed ▪ Easy maintenance	FWL-DAT/DAF		AC	Cooling: 1.46 - 8.02 kW Heating: 1.90 - 10.03 kW
	Concealed flexi type unit ▪ For horizontal or vertical concealed mounting ▪ Continuous air flow regulation and fan speed modulation ▪ Up to 70% energy savings ▪ Low sound levels	FWS-AT/AF		BLDC	Cooling: 2.64 - 10.08 kW Heating: 2.46 - 11.18 kW
	Concealed flexi type unit ▪ For horizontal or vertical concealed mounting ▪ Insulated valve packages, no extra drain pan required ▪ Fast-on connections for electrical options: no tools needed ▪ Easy maintenance	FWM-DAT/DAF		AC	Cooling: 1.46 -8.02 kW Heating: 1.90 - 10.03 kW
	Concealed flexi type unit ▪ For horizontal or vertical concealed mounting ▪ Available static pressure up to 30 Pa ▪ Easy installation and maintenance ▪ 5/6 speed fan motor ▪ High power air flow	FWE-DT/DF		AC	Cooling: 1.2 - 5.6 kW Heating: 1.3 - 6.3 kW

Size

	1	15	2	25	3	35	4	5	6	7	8	9	10	11	12	14	15	16	17	18	20	24
									•	•	•	•										
			•		•		•	•														
			•		•		•		•	•	•											
			•		•		•		•	•	•											
			•		•		•	•														
									•	•	•	•										
			•		•				•		•											
	•	•	•	•	•	•	•		•		•		•									
			•		•				•		•											
	•	•	•	•	•	•	•		•		•		•									
			•		•				•		•											
	•	•	•	•	•	•	•		•		•		•									
			•		•		•	•	•	•	•		•	•								

Products overview

Type	Model	Product name		Fan motor type	Capacity
Ducted units	**Ducted unit with medium ESP** ▪ Horizontal concealed mounting ▪ Available static pressure up to 130 Pa ▪ Variable dip switch on the BLDC fan motor for ESP adjustment	**FWQ-AT/AF**		BLDC	Cooling: 2.1 - 11.5 kW Heating: 2.63 – 11.8 kW
	Ducted unit with low ESP ▪ For horizontal concealed mounting ▪ Available static pressure up to 80 Pa ▪ Easy installation and maintenance ▪ 4-speed fan-motor ▪ Improved sound quality	**FWE-FT/FF**		AC	Cooling: 0.9 - 11.5 kW Heating: 1.49 - 12.05 kW
	Ducted unit with medium ESP ▪ For horizontal concealed mounting ▪ Instant adjustment to temperature and relative humidity changes ▪ Available static pressure up to 70 Pa ▪ Low sound levels	**FWP- CT/ CF**		BLDC	Cooling: 1.97 - 8.28 kW Heating: 1.99 - 8.46 kW
	Ducted unit with medium ESP ▪ For horizontal concealed mounting ▪ Available static pressure up to 60 Pa ▪ 7-speed electrical motors (thermal protection on windings) ▪ Easy maintenance	**FWB-CT/CF**		AC	Cooling: 1.90 - 8.12 kW Heating: 1.99 - 8.46 kW
	Ducted unit with high ESP ▪ For horizontal or vertical concealed mounting ▪ Available static pressure up to 70 Pa ▪ Easy maintenance	**FWN-AT/AF**		BLDC	Cooling: 2.83 - 8.75 kW Heating: 3.63 - 18.10 kW
	Ducted unit with high ESP ▪ For horizontal or vertical concealed mounting ▪ Available static pressure from 60 up to 145 Pa ▪ Easy maintenance	**FWD-AT/AF**		AC	Cooling: 3.90 - 18.30 kW Heating: 4.05 - 21.92 kW
Wall mounted unit	**Ducted unit with low ESP** ▪ Easy installation and maintenance ▪ BLDC fan-motor with improved energy efficiency ▪ Double filtration stage ▪ Embedded Flash Streamer technology ▪ Internal 3-way ON-OFF valve	**FWT-HT**		BLDC	Cooling: 2.43 - 5.28 kW Heating: 2.73 - 6.24 kW

Size

	1	15	2	25	3	35	4	5	6	7	8	9	10	11	12	14	15	16	17	18	20	24	25
							•			•		•		•		•			•		•		•
							•	•	•		•		•		•	•		•				•	
							•	•	•		•		•	•			•		•				
							•	•	•		•		•	•			•		•				
							•	•	•	•	•		•										
							•		•		•		•		•			•		•			
			•		•		•	•	•														

Round flow cassette

- BLDC fan motor unit for ceiling mounting. 360° air discharge
- 360° air discharge ensures uniform air flow and temperature distribution
- Modern style decoration panel in white (RAL9010)
- Optional fresh air intake
- Comfortable horizontal air discharge ensures draughtfree operation and prevents ceiling soiling
- Possibility to shut 1 or 2 flaps for easy installation in corners
- Standard drain pump with 850mm lift increases flexibility and installation speed

FWC-BT/BF

BRC7F532F

BRC1HF7



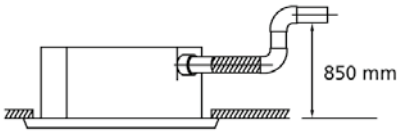

FWC-BT FWC-BF

Indoor unit			FWC-BT/BF	06	07	08	09	06	07	08	09
				2-pipe				4-pipe			
Cooling capacity (standard conditions)	Total capacity	High	kW	5.5	6.1	7.2	8.1	5.9	6.3	7.2	8.3
		Medium	kW	4.7	5.3	5.9	6.8	5.1	5.6	6.2	6.9
		Low	kW	3.9	4.5	4.8	5.4	4.3	4.6	4.8	5.7
	Sensible capacity	High	kW	4.2	4.7	5.7	6.5	4.2	4.6	5.4	6.4
		Medium	kW	3.5	4.0	4.5	5.3	3.6	4.0	4.5	5.2
		Low	kW	2.8	3.3	3.5	4.1	3.1	3.3	3.5	4.0
Heating capacity (standard conditions)	High		kW	6.8	7.7	9.2	10.6	6.9	7.8	9.2	10.4
	Medium		kW	5.8	6.6	7.6	8.8	6.1	6.7	7.6	8.7
	Low		kW	4.8	5.5	5.8	7.0	5.2	5.5	5.8	6.8
Power input	High		kW	0.045	0.054	0.077	0.107	0.046	0.055	0.077	0.107
	Medium		kW	0.040	0.046	0.058	0.076	0.041	0.047	0.059	0.077
	Low		kW	0.034	0.037	0.039	0.045	0.035	0.038	0.040	0.046
FCEER				116	119	113	104	124	120	112	106
FCCOP				143	147	141	137	149	144	138	131
Dimensions	Unit	HeightxWidthxLength	mm	288x840x840							
Weight	Unit		kg	26				29			
Fan	Type			Turbo fan							
	Quantity			1							
	Air flow rate	High	m^3/h	1,068	1,236	1,518	1,776	1,032	1,200	1,476	1,746
		Medium	m^3/h	894	1,038	1,200	1,410	864	1,002	1,164	1,374
		Low	m^3/h	720	834	888	1,044	708	804	852	1,014
Total sound power level	High		dBA	43.0	47.0	53.0	57.0	43.0	47.0	53.0	57.0
	Medium		dBA	36.0	39.0	44.0	49.0	36.0	39.0	44.0	49.0
	Low		dBA	31.0	33.0	36.0	40.0	33.0	36.0		40.0
Sound pressure level	High		dBA	29.0	33.0	39.0	43.0	29.0	33.0	39.0	43.0
	Medium		dBA	24.0	28.0	32.0	37.0	24.0	28.0	32.0	37.0
	Low		dBA	21.0	22.0	24.0	28.0	21.0	22.0	24.0	28.0
Piping connections	Drain	OD	mm	VP25 (External dia.32 / internal dia. 25)							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-240							
Control systems	Infrared remote control			BRC7E532F / BRC7E533F							
	Wired remote control			BRC1HF7							

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

4-way blow ceiling mounted cassette

- AC fan motor unit for ceiling mounting. Possibility to shut 1 or 2 flaps
- Modern style decoration panel in white (RAL9010)
- Compact casing (570mm in width and length) enables unit to fit flush into ceilings and match standard architectural modules, without cutting ceiling tiles
- Comfortable horizontal auto swing ensures draughtfree operation and prevents ceiling soiling
- Optional fresh air intake
- Possibility to shut 1 or 2 flaps for easy installation in corners
- Standard drain pump with 750mm lift increases flexibility and installation speed

FWF-BT/BF

BRC7E530

BRC1HF7



FWF-BT FWF-BF

Indoor unit			FWF-BT/BF	02	03	04	05	02	03	04	05
				2-pipe				4-pipe			
Cooling capacity (standard conditions)	Total capacity	High	kW	1.7	3.0	4.0	4.9	1.8	2.9	3.8	4.6
		Medium	kW	1.5	2.7	3.1	4.0	1.5	2.4	3.1	3.8
		Low	kW	1.3	2.4		2.8	1.3	1.6		2.6
	Sensible capacity	High	kW	1.4	2.0	2.7	3.5	1.5	1.8	2.5	3.2
		Medium	kW	1.2	1.7	2.0	2.7	1.2	1.5	1.9	2.5
		Low	kW	1.0	1.4		1.8		1.0		1.6
Heating capacity (standard conditions)		High	kW	2.4	3.3	4.5	5.6	3.3	3.6	4.7	5.7
		Medium	kW	2.1	2.9	3.5	4.4	2.9	3.1	3.7	4.7
		Low	kW	1.9	2.7		3.0	2.4	2.6		3.2
Power input		High	kW	0.074		0.090	0.118	0.074		0.094	0.121
		Medium	kW	0.067		0.070	0.089	0.067	0.062	0.074	0.093
		Low	kW	0.060		0.055	0.062	0.060	0.055		0.066
FCEER				22	40	44	45	22	33	34	40
FCCOP				32	45	49		41	48		49
Dimensions	Unit	HeightxWidthxLength	mm	285x575x575							
Weight	Unit		kg	19				20			
Fan	Type			Turbo fan							
	Quantity			1							
	Air flow rate	High	m^3/h	456	468	660	876	468	438	618	822
		Medium	m^3/h	384	390	486	648	390	366	456	612
		Low	m^3/h	300	318		420	318	300		390
Total sound power level	High		dBA	44.0		50.0	55.0	44.0	46.0	52.0	57.0
	Medium		dBA	40.0		44.0	49.0	40.0	42.0	46.0	51.0
	Low		dBA	36.0	38.0		42.0	36.0	38.0	41.0	44.0
Sound pressure level	High		dBA	31.0		40.0	45.0	31.0	33.0	42.0	47.0
	Medium		dBA	27.0		33.0	39.0	27.0	29.0	35.0	41.0
	Low		dBA	26.0			30.0	26.0	27.0		32.0
Piping connections	Drain	OD	mm	VP20 (External dia.26 / Internal dia. 20)							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-440							
Control systems	Infrared remote control			BRC7E530 / BRC7E531							
	Wired remote control			BRC1HF7							

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

Open protocol 2x2 Cassette

- BLDC fan motor unit for ceiling mounting
- 4-way air discharge
- Compact casing (570mm in width and length) enables unit to fit flush into ceilings and match standard architectural modules, without cutting ceiling tiles
- Modern ABS or fully-flat design air intake grille
- Reliability and sturdiness in a compact design
- Condensate drainage pump up to 835mm lift
- Wide range of controllers with the open protocol
- Availability of 2-way or 3-way valves with ON-OFF actuator factory mounted

FWF-DT/DF

FWEC10

FWEC3A

FWEDA

SHINKA TOUCH/ SHINKA ZONE

FWF-D

Indoor Unit				FWF	02DF	02DT	03DT	03DF	04DF	04DT	05DT	05DF
Cooling capacity (standard conditions)	Total capacity 2-pipe	High	kW		-	2.00	3.00	-		4.07	5.10	-
		Medium	kW		-	1.67	2.78	-		3.41	4.16	-
		Low	kW		-	1.30	2.37	-		2.65	2.93	-
	Total capacity 4-pipe	High	kW		2.00	-		3.00	4.00	-		5.02
		Medium	kW		1.71	-		2.77	3.33	-		4.00
		Low	kW		1.44	-		2.30	2.58	-		2.64
	Sensible capacity 2-pipe	High	kW		-	1.76	2.31	-		3.01	3.88	-
		Medium	kW		-	1.43	2.08	-		2.49	3.08	-
		Low	kW		-	1.09	1.75	-		1.91	2.11	-
	Sensible capacity 4-pipe	High	kW		1.76	-		2.19	2.88	-		3.67
		Medium	kW		1.46	-		1.99	2.33	-		2.88
		Low	kW		1.20	-		1.61	1.78	-		1.85
	Latent capacity 2-pipe	High	kW		-	0.24	0.69	-		1.06	1.22	-
	Latent capacity 4-pipe	High	kW		0.24	-		0.81	1.12	-		1.35
Heating capacity (standard conditions)	Capacity 2-pipe	High	kW		-	2.54	3.30	-		4.26	5.74	-
		Medium	kW		-	2.05	2.96	-		3.48	4.34	-
		Low	kW		-	1.56	2.44	-		2.69	2.95	-
	Capacity 4-pipe	High	kW		3.31	-		4.15	4.59	-		5.64
		Medium	kW		2.77	-		3.61	3.75	-		4.32
		Low	kW		2.23	-		2.78	2.90	-		2.99
Power input			kW		0.017	0.018	0.019		0.024		0.045	0.047
			kW			0.01		0.02		0.01	0.02	
FCEER					129	121	188	156	174	180	120	130
FCCOP					220	156	197	193	198	194	128	174
FCEER CLASS					B		A			B		
FCCOP CLASS					B	C		B			C	B
Dimensions	Unit	HeightxWidthxDepth	mm		260x642x575							
Weight	Unit		kg		16.0	14.5	15.5	17.0		15.5		17.0
Fan	Type				Turbo fan							
	Quantity				1							
	Air flow rate	High	m^3/h		477	498	516	534	612	623	860	847
		Medium	m^3/h		389	388	455	463	487	496	634	607
		Low	m^3/h		301	278	363	356	361	369	408	367
Total sound power level	High		dBA		41.0		42.0	44.0	48.0	47.0	54.0	56.0
	Medium		dBA		37.0		39.0	40.0	43.0	41.0	46.0	48.0
	Low		dBA		34.0	33.0	36.0		38.0	36.0	39.0	40.0
Sound pressure level	High		dBA		27.0		28.0	30.0	34.0	33.0	40.0	42.0
	Medium		dBA		23.0		25.0	26.0	29.0	27.0	32.0	34.0
	Low		dBA		20.0	19.0	22.0		24.0	22.0	25.0	26.0
Water flow	Cooling	High	l/h		345	344	515	516	687	699	878	864
		Medium	l/h		294	286	477	476	573	586	716	687
		Low	l/h		248	224	407	396	444	455	504	455
	Heating	High	l/h		285	437	568	357	395	733	987	485
		Medium	l/h		238	353	508	310	322	599	747	371
		Low	l/h		192	269	419	239	249	463	507	257
Piping connections	Drain	OD	mm		VP20 (External dia.26 / Internal dia. 20)							
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50/230							

Cooling: air 27°CDB, 19°CWB; entering water 7°C; leaving water 12°C | Heating: 2 pipe: air 20°CDB, 15°CWB; entering water 45°C; leaving water 40°C | Heating: 4 pipe: air 20°CDB, 15°CWB; entering water 65°C; leaving water 55°C | The unit is not pre-charged. A minimal rest charge is present related to factory quality inspection | Airflow value measurements are performed at 20°C(DB)/15°C(WB) condition.

Open protocol 3x3 Cassette

- BLDC fan motor for a precise control of operation
- 4-way air discharge
- Reduced energy consumption thanks to specially developed heat exchanger, DC fan motor and drain pump
- Optional fresh air intake
- Open protocol unit allows controller integration
- Standard drain pump with 835mm lift increases flexibility and installation speed
- Unit fits into standard 900x900 architectural modules
- Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010).
- Availability of 2-way or 3-way valves with ON-OFF actuator factory mounted

FWC-DF FWC-DT

Indoor Unit			FWC/FWC	06DF	07DF	08DF	09DF	06DT	07DT	08DT	09DT
Cooling capacity (standard conditions)	Total capacity 2-pipe	High	kW			-		6.34	7.53	8.7	9.66
		Medium	kW			-		4.98	5.74	6.44	6.89
		Low	kW			-		4.06	4.51	4.81	4.88
	Total capacity 4-pipe	High	kW	6.01	7.15	8.41	9.58		-		
		Medium	kW	4.76	5.45	6.16	6.69		-		
		Low	kW	3.96	4.35	4.68	4.85		-		
	Sensible capacity 2-pipe	High	kW			-		4.9	5.87	6.87	7.84
		Medium	kW			-		3.8	4.42	5.02	5.41
		Low	kW			-		3.04	3.38	3.63	3.69
	Sensible capacity 4-pipe	High	kW	4.58	5.58	6.66	7.79		-		
		Medium	kW	3.59	4.17	4.75	5.28		-		
		Low	kW	2.93	3.26	3.52	3.64		-		
	Latent capacity 2-pipe	High	kW			-		1.44	1.66	1.83	1.82
	Latent capacity 4-pipe	High	kW	1.43	1.57	1.75	1.79		-		
Heating capacity (standard conditions)	Capacity 2-pipe	High	kW			-		6.79	8.14	9.51	10.7
		Medium	kW			-		5.2	6.05	6.83	7.36
		Low	kW			-		4.15	4.62	4.94	5.02
	Capacity 4-pipe	High	kW	7.47	8.82	10.21	11.47		-		
		Medium	kW	5.9	6.74	7.52	8.08		-		
		Low	kW	4.87	5.34	5.65	5.77		-		
Power input			kW	0.043	0.069	0.102	0.165	0.045	0.071	0.104	0.167
			kW		0.02		0.03	0.02		0.03	
FCEER				182	174	160	137	174	170	156	133
FCCOP				225	216	196	167	179	177	164	141
FCEER CLASS				B							
FCCOP CLASS				B							C
Dimensions	Unit	HeightxWidthxDepth	mm	287x837x921							
Weight	Unit		kg	27				25			
Fan	Air flow rate	High	m^3/h	1,051	1,296	1,563	1,816	1,080	1,336	1,615	1,881
		Medium	m^3/h	782	920	1,053	1,143	798	943	1,081	1,176
		Low	m^3/h	614	686	734	743	621	697	747	757
Total sound power level	High		dBA	46	52	57	62	46	52	56	61
	Medium		dBA	39	43	46	50	38	42	46	49
	Low		dBA	35	36	37	40	35		36	39
Sound pressure level	High		dBA	33	39	44	49	33	39	43	48
	Medium		dBA	26	30	33	37	25	29	33	36
Sound pressure level	Low		dBA	22	23	24	27	22		23	26
Water flow	Cooling	High	l/h	1,090	1,295	1,496	1,647	1,090	1,295	1,496	1,661
		Medium	l/h	856	987	1,107	1,150	856	987	1,107	1,184
		Low	l/h	698	776	827	833	698	776	827	839
	Heating	High	l/h	642	759	877	986	1,167	1,400	1,635	1,841
		Medium	l/h	508	580	646	695	894	1,040	1,175	1,266
		Low	l/h	419	459	486	496	713	794	850	863
Piping connections	Drain	OD	mm	VP25 (External dia.32; internal dia. 25)							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /230							

Cooling: air 27°CDB, 19°CWB; entering water 7°C; leaving water 12°C | Heating: 2 pipe: air 20°CDB, 15°CWB; entering water 45°C; leaving water 40°C | Heating: 4 pipe: air 20°CDB, 15°CWB; entering water 65°C; leaving water 55°C | Do not let water of less than 5°C or more than 90°C enter the unit, this may damage the unit | Airflow: 20°C DB, 15°C WB; 230V 50Hz 0Pa

Open protocol Cassette

- BLDC fan motor for a precise control of operation
- 4-way air discharge
- Two dimensional frames (600x600mm and 900x900mm)
- Modern style ABS air intake diffusion grille
- Low operating sound level
- Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- Condensate drainage pump up to 900mm lift
- Available with mounted control board or in naked version to be combinable with any controller
- Reduced installation and commissioning time with the availability of 2-way or 3-way valves, with ON-OFF or modulating actuator, and also pressure-independent control valves



FWI-AT/AF

FWEC10

FWEC3A

FWEDA

SHINKA TOUCH/ SHINKA ZONE

FWI-AT FWI-AF

Indoor unit			FWI-AT/FWI-AF	02	03	04	06	07	08	02	04	06	08
				2-pipe						4-pipe			
Cooling capacity (standard conditions)	Total capacity	High	kW	2.63	4.39	5.23	6.39	9.04	10.5	2.6	3.61	6.61	9.5
		Medium	kW	2.24	3.4	3.95	5.36	7.26	8.37	2.18	2.8	5.34	7.62
		Low	kW	1.93	2.68	2.76	4.8	5.92	6.7	1.85	2.05	4.61	6.09
	Sensible capacity	High	kW	2.2	3.41	4.11	4.75	6.78	7.97	2.23	3.31	5.03	7.56
		Medium	kW	1.81	2.54	2.96	3.92	5.31	6.15	1.79	2.38	3.94	5.82
		Low	kW	1.51	1.94	1.98	3.8	4.24	4.8	1.46	1.62	3.34	4.5
Heating capacity (standard conditions)	High		kW	3.25	4.58	5.55	7.30	10.20	12.20	3.86	4.98	9.53	12.90
	Medium		kW	2.70	3.48	4.09	6.00	7.99	9.35	3.34	4.06	7.96	10.80
	Low		kW	2.27	2.69	2.77	5.50	6.33	7.23	2.90	3.14	7.01	8.96
Power input	High		kW	0.018	0.037	0.067	0.036	0.067	0.15	0.018	0.067	0.036	0.15
	Medium		kW	0.01	0.015	0.022	0.018	0.036	0.06	0.01	0.022	0.018	0.06
	Low		kW	0.007	0.009	0.009	0.013	0.018	0.025	0.007	0.009	0.014	0.025
Dimensions	Unit	Height	mm	298			350			298		350	
		Width	mm	577			793			577		793	
		Depth	mm	577			793			577		793	
Weight	Unit		kg	23			43			23		43	
Casing	Material			Galvanised steel									
Decoration panel	Dimensions	Height	mm	41			75			41		75	
		Width	mm	730			860			730		860	
		Depth	mm	730			860			730		860	
		Weight	kg	2.5			5			2.5		5	
Air Filter	Type			Honeycomb polypropylene									
Fan	Type			Backward Centrifugal									
	Quantity			1									
	Air flow rate	High	m^3/h	583	796	980	1,276	1,554	1,831	610	982	1,137	1,823
		Medium	m^3/h	454	551	650	978	1,143	1,321	460	643	841	1,314
		Low	m^3/h	397	397	397	843	864	976	356	395	687	956
Total sound power level	High		dBA	46	54	61	45	53	58	46	61	45	58
	Medium		dBA	40	44	49	39	45	50	40	49	39	50
	Low		dBA	35	37	38	35	39	43	35	38	35	43
Sound pressure level	High		dBA	38	46	61	37	45	50	46	61	45	58
	Medium		dBA	33	36	49	31	37	42	40	49	39	50
	Low		dBA	27	29	38	27	31	35		38	35	43
Water flow	Cooling	High	l/h	452	754	898	1,097	1,545	1,805	447	620	1,135	1,631
		Medium	l/h	385	584	687	921	1,245	1,436	374	480	917	1,307
		Low	l/h	331	460	473	833	1,015	1,150	317	352	792	1,045
	Heating	High	l/h	565	797	965	1,269	1,779	2,116	338	435	834	1,133
		Medium	l/h	470	605	711	1,043	1,390	1,625	292	356	697	947
		Low	l/h	395	468	481	953	1,100	1,257	254	275	613	785
Allowed water temperature	Cooling	Min	°C	5									
	Heating	Max	°C	70									
Piping connections	Water	Inlet		1/2"			3/4"			1/2"		3/4"	
		Outlet		1/2"			3/4"			1/2"		3/4"	
	Drain	OD	mm	10									
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230									
Maximum absorbed current			A	0.64			1.20			0.64		1.20	
Control systems	Wired remote control			FWEC3A/FWEDA/SHINKA/FWEC10									

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

Open protocol Cassette

- AC fan motor unit for ceiling mounting
- 4-way air discharge
- Two dimensional frames (600x600mm and 900x900mm)
- Modern style ABS air intake diffusion grille
- Reliability and sturdiness in a compact design
- Condensate drainage pump up to 900mm lift
- Available with mounted control board or in naked version to be combinable with any controller
- Reduced installation and commissioning time with the availability of 2-way or 3-way valves with ON-OFF or modulating actuator



FWH-AT/AF

FWEC2T/4T

FWEC1,2,3A

FWEDA

SHINKA TOUCH/
SHINKA ZONE

FWH-AT FWH-AF

Indoor unit			FWH-AT/FWH-AF	02	03	04	06	07	08	02	03	04	06	08
				2-pipe						4-pipe				
Cooling capacity (standard conditions)	Total capacity	High	kW	2.53	4.31	5	7.01	8.24	9.73	2.35	3.38	3.62	7.45	9
		Medium	kW	1.97	3.55	4.61	5.36	6.11	8.61	1.85	2.83	3.38	6.6	8.48
		Low	kW	1.7	2.39	3.4	4.64	5.16	6.34	1.56	2.01	2.58	4.73	5.83
	Sensible capacity	High	kW	2.14	3.18	3.79	5.29	6.1	7.35	1.94	3.38	3.02	5.81	6.98
		Medium	kW	1.6	2.53	3.44	3.99	4.37	6.4	1.49	2.22	2.77	5.04	6.56
		Low	kW	1.33	1.66	2.43	3.42	3.68	4.59	1.24	1.49	2	3.47	4.29
Heating capacity (standard conditions)	High		kW	3.1	4.3	5.35	8.17	9.18	11.1	3.55	4.22	4.81	10.6	12.4
	Medium		kW	2.33	3.44	4.92	6.06	6.53	9.53	2.88	3.62	4.54	9.6	11.7
	Low		kW	1.97	2.29	3.49	5.16	5.22	6.71	2.53	2.75	3.67	7.20	8.64
Power input	High		kW	0.04	0.05	0.09	0.11		0.15	0.04	0.05	0.09	0.11	0.15
	Medium		kW	0.02	0.04	0.07	0.06		0.11	0.02	0.04	0.07	0.06	0.11
	Low		kW	0.02	0.03	0.06	0.05		0.06	0.02	0.03	0.06	0.05	0.06
Dimensions	Unit	Height	mm	298			350			298			350	
		Width	mm	577			793			577			793	
		Depth	mm	577			793			577			793	
Weight	Unit		kg	23			43			23			43	
Casing	Material			Galvanised steel										
Decoration panel	Dimensions	Height	mm	41			75			41			75	
		Width	mm	730			860			730			860	
		Depth	mm	730			860			730			860	
		Weight	kg	2.5			5			2.5			5	
Air Filter	Type			Honeycomb polypropylene										
Fan	Type			Backward Centrifugal										
	Quantity			1										
	Air flow rate	High	m^3/h	557	640	805	1,494	1,380	1,651	533	640	805	1,380	1,651
		Medium	m^3/h	379	487	717	997	902	1,380	366	487	717	1,147	1,544
		Low	m^3/h	297	306	479	801	718	902	289	306	479	718	902
Total sound power level	High		dBA	45	50	58	51		56	45	50	58	51	56
	Medium		dBA	37	44	55	40		51	37	44	55	40	51
	Low		dBA	33	40	47	35		40	33	40	47	35	40
Sound pressure level	High		dBA	37	42	50	43		48	37	42	50	43	48
	Medium		dBA	29	36	47	32		43	29	36	47	32	43
	Low		dBA	25	32	39	27		32	25	32	39	27	32
Water flow	Cooling	High	l/h	441	749	873	1,223	1,434	1,696	410	589	637	1,299	1,571
		Medium	l/h	342	616	803	930	1,060	1,498	321	493	593	1,148	1,477
		Low	l/h	295	416	593	805	893	1,097	271	351	453	822	1,010
	Heating	High	l/h	539	747	930	1,420	1,596	1,930	311	369	421	929	1,083
		Medium	l/h	404	597	855	1,053	1,136	1,656	258	317	398	840	1,026
		Low	l/h	342	399	607	897	908	1,167	222	241	322	634	757
Allowed water temperature	Cooling	Min	°C	5										
	Heating	Max	°C	70										
Piping connections	Water	Inlet		1/2"			3/4"			1/2"			3/4"	
		Outlet		1/2"			3/4"			1/2"			3/4"	
	Drain	OD	mm	10										
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230										
Maximum absorbed current			A	0.2		0.4	0.7			0.2		0.4	0.7	
Control systems	Wired remote control			FWEC3A/FWEDA/SHINKA/FWEC2T/4T										

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

Floor standing unit

- BLDC fan motor unit for vertical mounting. Continuous air flow regulation and fan speed modulation
- Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- Instant adjustment to temperature and relative humidity changes
- Low operating sound level
- Highly flexible solutions: multiple sizes, piping topologies and connection valves
- Requires very little installation space

FWZ-AT/AF

FWEC10

FWEC3A

FWEDA

SHINKA TOUCH/ SHINKA ZONE

FWZ-AT FWZ-AF

Indoor unit			FWZ-AT/AF	02	03	06	08	02	03	06	08
				2-pipe				4-pipe			
Cooling capacity (standard conditions)	Total capacity	High	kW	1.94	2.91	4.48	7.93	1.77	2.86	4.64	7.79
		Medium	kW	1.69	2.37	3.64	6.2	1.55	2.32	3.79	6.12
		Low	kW	1.35	1.75	2.99	4.1	1.25	1.72	3.10	4.06
	Sensible capacity	High	kW	1.49	2.09	3.62	5.87	1.44	2.06	3.54	5.76
		Medium	kW	1.30	1.69	2.90	4.59	1.21	1.65	2.85	4.54
		Low	kW	1.04	1.25	2.31	3.04	0.97	1.23	2.27	3.01
Heating capacity (standard conditions)	High		kW	2.15	2.94	4.88	8.37	1.76	2.68	4.64	7.35
	Medium		kW	1.81	2.37	4.11	6.53	1.56	2.31	4.07	6.29
	Low		kW	1.50	1.76	3.36	4.39	1.36	1.88	3.55	4.85
Power input	High		kW	0.019	0.016	0.033	0.087	0.019	0.016	0.033	0.087
	Medium		kW	0.01		0.02	0.038	0.01		0.02	0.038
	Low		kW	0.01			0.013	0.01			0.013
FCEER				B	A			B	A		B
FCCOP				B	A			B	A		B
Dimensions	Unit	HeightxWidthxLength	mm	564x774x226	564x984x226	564x1,190x226	564x1,404x251	564x774x226	564x984x226	564x1,190x226	564x1,404x251
Weight	Unit		kg	20.6	26.7	32.3	41.6	20.6	26.7	32.3	41.6
Casing	Colour			White - RAL9010							
Air filter	Type			Polypropylene net							
Fan	Type			Centrifugal							
	Quantity			1	2			1	2		
	Air flow rate	High	m^3/h	344	442	785	1,393	327	431	763	1,362
		Medium	m^3/h	271	341	605	1,022	261	332	593	1,007
		Low	m^3/h	211	241	470	642	205	237	460	636
Total sound power level	High		dBA	50.0	48.0	56.0	67.0	50.0	47.0	58.0	66.0
	Medium		dBA	44.0	42.0	49.0	60.0	44.0	41.0	53.0	58.0
	Low		dBA	40.0	36.0	43.0	49.0	38.0	33.0	48.0	
Sound pressure level	High		dBA	45.0	43.0	51.0	62.0	45.0	42.0	54.0	61.0
	Medium		dBA	39.0	37.0	44.0	55.0	39.0	36.0	48.0	53.0
	Low		dBA	35.0	31.0	38.0	44.0	33.0	28.0	43.0	
Electric heater	Power input (Optional)		kW	1.5	1.6	2.0	-	1.5	1.6	2.0	-
Piping connections	Drain	OD	mm	16							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230							
Control systems	Wired remote control			FWEC3A/FWEDA/SHINKA/FWEC10							

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

Floor standing unit

- AC fan motor unit for vertical mounting
- Quick fixing system for wall mounted installation
- Pre-assembled 3-way/4-port on/off valves are available
- Valve packages are insulated, no extra drain pan required
- Valve packages contain balancing valves and sensor pocket
- Fast-on connections for electrical options: no tools needed
- The air filter can easily be removed for cleaning
- Electric heater: no relay up to 2kW capacity
- Electric heater: equipped with two overheat cut-out thermostats

FWV-DAT FWV-DAF

Indoor unit			FWV-DAT/DAF	01	15	02	25	03	35	04	06	08	10	01	15	02	25	03	35	04	06	08	10
				2-pipe										4-pipe									
Cooling capacity (standard conditions)	Total capacity	High	kW	1.50	1.69	1.91	2.36	2.87	3.45	4.23	4.41	6.53	7.78	1.42	1.64	1.74	2.32	2.81	3.36	4.16	4.57	6.46	7.64
		Medium	kW	1.21	1.48	1.66	1.99	2.34	2.58	3.21	3.59	5.14	6.07	1.11	1.44	1.52	1.96	2.29	2.54	3.17	3.74	5.10	5.99
		Low	kW	1.02	1.24	1.34	1.57	1.73	1.94	2.47	2.95	3.88	4.00	0.97	1.22	1.24	1.55	1.70	1.92	2.44	3.06	3.84	3.96
	Sensible capacity	High	kW	1.16	1.25	1.37	1.82	2.05	2.69	3.05	3.55	4.73	5.72	1.10	1.22	1.41	1.79	2.01	2.61	2.99	3.47	4.67	5.61
		Medium	kW	0.94	1.10	1.20	1.53	1.66	1.99	2.39	2.85	3.70	4.46	0.87	1.07	1.18	1.50	1.62	1.96	2.36	2.80	3.67	4.40
		Low	kW	0.77	0.93	0.98	1.15	1.23	1.41	1.76	2.27	2.75	2.94	0.73	0.91	0.96	1.14	1.21	1.40	1.74	2.23	2.73	2.91
Heating capacity (standard conditions)	High		kW	1.82	1.84	2.15	2.70	2.94	4.05	4.24	4.98	6.49	8.37	1.66	1.76		2.53	2.68	4.20	3.82	4.64	6.97	7.35
	Medium		kW	1.48	1.72	1.81	2.26	2.37	3.13	3.24	4.08	5.17	6.53	1.49	1.56		2.18	2.31	3.47	3.22	4.07	6.02	6.29
	Low		kW	1.21	1.45	1.50	1.74	1.76	2.39	2.47	3.31	3.97	4.39	1.31	1.36		1.78	1.88	2.82	2.73	3.55	5.02	4.85
Power input	High		kW	0.037	0.053		0.057	0.056	0.065	0.098		0.182	0.244	0.037	0.053		0.057	0.056	0.065	0.098		0.182	0.244
	Medium		kW	0.03	0.04			0.05	0.06	0.07	0.13	0.17		0.03	0.04			0.05	0.06	0.07	0.13	0.17	
	Low		kW	0.02	0.03	0.02	0.03		0.04	0.05	0.09	0.11		0.02	0.03	0.02	0.03		0.04	0.05	0.09	0.11	
Dimensions	Unit	HeightxWidthxLength	mm	564x774x226			564x984x226		564x1,190x226			564x1,400x251		564x774x226			564x984x226		564x1,190x226			564x1,400x251	
Weight	Unit		kg	19.7		20.6	25.5	26.7	31.0	30.4	32.3	41.4	41.6	19.7		20.6	25.5	26.7	31.0	30.4	32.3	41.4	41.6
Casing	Colour			White - RAL9010																			
Air filter	Type			Polypropylene net																			
Fan	Type			Centrifugal																			
	Quantity			1			2							1			2						
	Air flow rate	High	m^3/h	319	344		442	640	706	785	1,011	1,393		307	330	327	432	431	628	690	763	998	1,362
		Medium	m^3/h	233	271		341	450	497	605	771	1,022		225	261		334	332	444	490	593	765	1,007
		Low	m^3/h	178	211		241	320	361	470	570	642		174	205		238	237	316	356	460	565	636
Total sound power level	High		dBA	47.0	49.0	50.0	48.0	52.0	53.0	56.0	61.0	67.0		45.0	49.0	50.0	48.0	47.0	53.0	56.0	58.0	60.0	66.0
	Medium		dBA	42.0	44.0		43.0	42.0	43.0	49.0	54.0	60.0		39.0	44.0		43.0	41.0	45.0	46.0	53.0	54.0	58.0
	Low		dBA	37.0	38.0	40.0	35.0	36.0	35.0	43.0	47.0	49.0		33.0	40.0	38.0	34.0	33.0	36.0	39.0	48.0	46.0	48.0
Sound pressure level	High		dBA	42.0	44.0	45.0	43.0	47.0	48.0	51.0	56.0	62.0		40.0	44.0	45.0	43.0	42.0	46.0	51.0	54.0	55.0	61.0
	Medium		dBA	37.0	39.0		38.0	37.0	38.0	44.0	49.0	55.0		34.0	39.0		38.0	36.0	38.0	41.0	48.0	49.0	53.0
	Low		dBA	32.0	33.0	35.0	30.0	31.0	30.0	38.0	42.0	44.0		28.0	33.0		29.0	28.0	29.0	32.0	43.0	41.0	43.0
Electric heater	Power input (Optional)		kW	1.0	1.5		1.6		2.0		3.0			1.0	1.5		1.6		2.0			3.0	
Piping connections	Drain	OD	mm	16																			
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230																			
Control systems	Wired remote control			FWEC3A/FWEDA/SHINKA/FWEC2T/4T																			

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

Flexi type unit

- BLDC fan motor unit for horizontal or vertical mounting. Continuous air flow regulation and fan speed modulation
- For wall or ceiling mounted installation: ideal solution for spaces with no false ceilings
- Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- Instant adjustment to temperature and relative humidity changes
- Low operating sound level
- Highly flexible solutions: multiple sizes, piping topologies and connection valves
- Requires very little installation space

FWR-AT FWR-AF

Indoor unit			FWR-AT/AF	02	03	06	08	02	03	06	08
				2-pipe				4-pipe			
Cooling capacity (standard conditions)	Total capacity	High	kW	1.94	2.91	4.48	7.93	1.77	2.86	4.64	7.79
		Medium	kW	1.69	2.37	3.64	6.20	1.55	2.32	3.79	6.12
		Low	kW	1.35	1.75	2.99	4.10	1.25	1.72	3.10	4.06
	Sensible capacity	High	kW	1.49	2.09	3.62	5.87	1.44	2.06	3.54	5.76
		Medium	kW	1.30	1.69	2.90	4.59	1.21	1.65	2.85	4.54
		Low	kW	1.04	1.25	2.31	3.04	0.97	1.23	2.27	3.01
Heating capacity (standard conditions)	High		kW	2.15	2.94	4.88	8.37	1.76	2.68	4.64	7.35
	Medium		kW	1.81	2.37	4.11	6.53	1.56	2.31	4.07	6.29
	Low		kW	1.50	1.76	3.36	4.39	1.36	1.88	3.55	4.85
Power input	High		kW	0.019	0.016	0.033	0.087	0.019	0.016	0.033	0.087
	Medium		kW	0.01		0.02	0.038	0.01		0.02	0.038
	Low		kW	0.01			0.013	0.01			0.013
FCEER				B	A			B	A		B
FCCOP				B	A			B	A		B
Dimensions	Unit	HeightxWidthxLength	mm	564x774x246	564x984x246	564x1,190x246	564x1,404x271	564x774x246	564x984x246	564x1,190x246	564x1,404x271
Weight	Unit		kg	21.2	27.5	33.6	43.1	21.2	27.5	33.6	43.1
Casing	Colour			White - RAL9010							
Air filter	Type			Polypropylene net							
Fan	Type			Centrifugal							
	Quantity			1	2			1	2		
	Air flow rate	High	m^3/h	344	442	785	1,393	327	431	763	1,362
		Medium	m^3/h	271	341	605	1,022	261	332	593	1,007
		Low	m^3/h	211	241	470	642	205	237	460	636
Total sound power level	High		dBA	50.0	48.0	56.0	67.0	50.0	47.0	58.0	66.0
	Medium		dBA	44.0	42.0	49.0	60.0	44.0	41.0	53.0	58.0
	Low		dBA	40.0	36.0	43.0	49.0	38.0	33.0	48.0	
Sound pressure level	High		dBA	45.0	43.0	51.0	62.0	45.0	42.0	54.0	61.0
	Medium		dBA	39.0	37.0	44.0	55.0	39.0	36.0	48.0	53.0
	Low		dBA	35.0	31.0	38.0	44.0	33.0	28.0	43.0	
Electric heater	Power input (Optional)		kW	1.5	1.6	2.0	-	1.5	1.6	2.0	-
Piping connections	Drain	OD	mm	16							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230							
Control systems	Wired remote control			FWEC3A/FWEDA/SHINKA/FWEC10							

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

Flexi type unit

- AC fan motor unit for horizontal or vertical mounting
- Quick fixing system for wall or ceiling mounted installation
- Pre-assembled 3-way/4-port on/off valves are available
- Valve packages are insulated, no extra drain pan required
- Valve packages contain balancing valves and sensor pocket
- Fast-on connections for electrical options: no tools needed
- The air filter can easily be removed for cleaning
- Electric heater: no relay up to 2kW capacity
- Electric heater: equipped with two overheat cut-out thermostats

FWL-DAT FWL-DAF

Indoor unit		FWL-DAT/DAF		01	15	02	25	03	35	04	06	08	10	01	15	02	25	03	35	04	06	08	10
				2-pipe										4-pipe									
Cooling capacity (standard conditions)	Total capacity	High	kW	1.50	1.69	1.91	2.36	2.87	3.45	4.23	4.41	6.53	7.78	1.42	1.64	1.74	2.32	2.81	3.36	4.16	4.57	6.46	7.64
		Medium	kW	1.21	1.48	1.66	1.99	2.34	2.58	3.21	3.59	5.14	6.07	1.11	1.44	1.52	1.96	2.29	2.54	3.17	3.74	5.10	5.99
		Low	kW	1.02	1.24	1.34	1.57	1.73	1.94	2.47	2.95	3.88	4.00	0.97	1.22	1.24	1.55	1.70	1.92	2.44	3.06	3.84	3.96
	Sensible capacity	High	kW	1.16	1.25	1.37	1.82	2.05	2.69	3.05	3.55	4.73	5.72	1.10	1.22	1.41	1.79	2.01	2.61	2.99	3.47	4.67	5.61
		Medium	kW	0.94	1.10	1.20	1.53	1.66	1.99	2.39	2.85	3.70	4.46	0.87	1.07	1.18	1.50	1.62	1.96	2.36	2.80	3.67	4.40
		Low	kW	0.77	0.93	0.98	1.15	1.23	1.41	1.76	2.27	2.75	2.94	0.73	0.91	0.96	1.14	1.21	1.40	1.74	2.23	2.73	2.91
Heating capacity (standard conditions)	High		kW	1.82	1.84	2.15	2.70	2.94	4.05	4.24	4.98	6.49	8.37	1.66	1.76		2.53	2.68	4.20	3.82	4.64	6.97	7.35
	Medium		kW	1.48	1.72	1.81	2.26	2.37	3.13	3.24	4.08	5.17	6.53	1.49	1.56		2.18	2.31	3.47	3.22	4.07	6.02	6.29
	Low		kW	1.21	1.45	1.50	1.74	1.76	2.39	2.47	3.31	3.97	4.39	1.31	1.36		1.78	1.88	2.82	2.73	3.55	5.02	4.85
Power input	High		kW	0.037	0.053		0.057	0.056	0.065	0.098		0.182	0.244	0.037	0.053		0.057	0.056	0.065	0.098		0.182	0.244
	Medium		kW	0.03	0.04				0.05	0.06	0.07	0.13	0.17	0.03	0.04				0.05	0.06	0.07	0.13	0.17
	Low		kW	0.02	0.03	0.02	0.03		0.04		0.05	0.09	0.11	0.02	0.03	0.02	0.03		0.04		0.05	0.09	0.11
Dimensions	Unit	HeightxWidthxLength	mm	564x774x246			564x984x246		564x1,190x246			564x1,400x271		564x774x246			564x984x246		564x1,190x246			564x1,400x271	
Weight	Unit		kg	20.6		21.2	26.5	27.5	32.5	33.5	33.6	43.1		20.6		21.2	26.5	27.5	32.5	33.5	33.6	43.1	
Casing	Colour			White - RAL9010																			
Air filter	Type			Polypropylene net																			
Fan	Type			Centrifugal																			
	Quantity			1			2							1			2						
	Air flow rate	High	m^3/h	319	344		442		640	706	785	1,011	1,393	307	330	327	432	431	628	690	763	998	1,362
		Medium	m^3/h	233	271		341		450	497	605	771	1,022	225	261		334	332	444	490	593	765	1,007
		Low	m^3/h	178	211		241		320	361	470	570	642	174	205		238	237	316	356	460	565	636
Total sound power level	High		dBA	47.0	49.0	50.0	48.0		52.0	53.0	56.0	61.0	67.0	45.0	49.0	50.0	48.0	47.0	53.0	56.0	58.0	60.0	66.0
	Medium		dBA	42.0	44.0		43.0	42.0	43.0		49.0	54.0	60.0	39.0	44.0		43.0	41.0	45.0	46.0	53.0	54.0	58.0
	Low		dBA	37.0	38.0	40.0	35.0	36.0	35.0		43.0	47.0	49.0	33.0	40.0	38.0	34.0	33.0	36.0	39.0	48.0	46.0	48.0
Sound pressure level	High		dBA	42.0	44.0	45.0	43.0		47.0	48.0	51.0	56.0	62.0	40.0	44.0	45.0	43.0	42.0	46.0	51.0	54.0	55.0	61.0
	Medium		dBA	37.0	39.0		38.0	37.0	38.0		44.0	49.0	55.0	34.0	39.0		38.0	36.0	38.0	41.0	48.0	49.0	53.0
	Low		dBA	32.0	33.0	35.0	30.0	31.0	30.0		38.0	42.0	44.0	28.0	33.0		29.0	28.0	29.0	32.0	43.0	41.0	43.0
Electric heater	Power input (Optional)		kW	1.0	1.5		1.6		2.0			3.0		1.0	1.5		1.6		2.0			3.0	
Piping connections	Drain	OD	mm	16																			
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230																			
Control systems	Wired remote control			FWEC3A/FWEDA/SHINKA/FWEC2T/4T																			

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

Concealed flexi type unit

- BLDC fan motor unit for horizontal or vertical concealed mounting. Continuous air flow regulation and fan speed modulation
- Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- Instant adjustment to temperature and relative humidity changes
- Low operating sound level
- Highly flexible solutions: multiple sizes, piping topologies and connection valves
- Available static pressure up to 50Pa at maximum speed

FWS-AT/AF

FWEC10

FWEC3A

FWEDA

SHINKA TOUCH/ SHINKA ZONE

FWS-AT FWS-AF

Indoor unit			FWS-AT/AF	02	03	06	08	02	03	06	08
				2-pipe				4-pipe			
Cooling capacity (standard conditions)	Total capacity	High	kW	1.94	2.91	4.48	7.93	1.77	2.86	4.64	7.79
		Medium	kW	1.69	2.37	3.64	6.2	1.55	2.32	3.79	6.12
		Low	kW	1.35	1.75	2.99	4.1	1.25	1.72	3.10	4.06
	Sensible capacity	High	kW	1.49	2.09	3.62	5.87	1.44	2.06	3.54	5.76
		Medium	kW	1.30	1.69	2.90	4.59	1.21	1.65	2.85	4.54
		Low	kW	1.04	1.25	2.31	3.04	0.97	1.23	2.27	3.01
Heating capacity (standard conditions)	High		kW	2.15	2.94	4.88	8.37	1.76	2.68	4.64	7.35
	Medium		kW	1.81	2.37	4.11	6.53	1.56	2.31	4.07	6.29
	Low		kW	1.50	1.76	3.36	4.39	1.36	1.88	3.55	4.85
Power input	High		kW	0.019	0.016	0.033	0.087	0.019	0.016	0.033	0.087
	Medium		kW	0.01		0.02	0.038	0.01		0.02	0.038
	Low		kW	0.01			0.013	0.01			0.013
FCEER				B	A			B	A		B
FCCOP				B	A			B	A		B
Dimensions	Unit	HeightxWidthxLength	mm	535x584x224	535x794x224	535x1,000x224	535x1,214x249	535x584x224	535x794x224	535x1,000x224	535x1,214x249
Weight	Unit		kg	16.9	22.1	26.6	35.4	16.9	22.1	26.6	35.4
Air filter	Type			Polypropylene net							
Fan	Type			Centrifugal							
	Quantity			1	2			1	2		
	Air flow rate	High	m^3/h	344	442	785	1,393	327	431	763	1,362
		Medium	m^3/h	271	341	605	1,022	261	332	593	1,007
		Low	m^3/h	211	241	470	642	205	237	460	636
Total sound power level	High		dBA	50.0	48.0	56.0	67.0	50.0	47.0	58.0	66.0
	Medium		dBA	44.0	42.0	49.0	60.0	44.0	41.0	53.0	58.0
	Low		dBA	40.0	36.0	43.0	49.0	38.0	33.0	48.0	
Sound pressure level	High		dBA	45.0	43.0	51.0	62.0	45.0	42.0	54.0	61.0
	Medium		dBA	39.0	37.0	44.0	55.0	39.0	36.0	48.0	53.0
	Low		dBA	35.0	31.0	38.0	44.0	33.0	28.0	43.0	
Electric heater	Power input (Optional)		kW	1.5	1.6	2.0	-	1.5	1.6	2.0	-
Piping connections	Drain	OD	mm	16							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230							
Control systems	Wired remote control			FWEC3A/FWEDA/SHINKA/FWEC10							

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

Concealed flexi type unit

- AC fan motor unit for horizontal or vertical concealed mounting
- Quick fixing system for wall or ceiling mounted installation
- Pre-assembled 3-way/4-port on/off valves are available
- Valve packages are insulated, no extra drain pan required
- Valve packages contain balancing valves and sensor pocket
- Fast-on connections for electrical options: no tools needed
- The air filter can easily be removed for cleaning
- Electric heater: no relay up to 2kW capacity
- Electric heater: equipped with two overheat cut-out thermostats
- Available static pressure up to 50Pa at maximum speed

FWM-DAT/DAF

FWEC2T/4T

FWEC1,2,3A

FWEDA

SHINKA TOUCH/ SHINKA ZONE

FWM-DAT FWM-DAF

Indoor unit			FWM-DAT/DAF	01	15	02	25	03	35	04	06	08	10	01	15	02	25	03	35	04	06	08	10
				2-pipe										4-pipe									
Cooling capacity (standard conditions)	Total capacity	High	kW	1.50	1.69	1.91	2.36	2.87	3.45	4.23	4.41	6.53	7.78	1.42	1.64	1.74	2.32	2.81	3.36	4.16	4.57	6.46	7.64
		Medium	kW	1.21	1.48	1.66	1.99	2.34	2.58	3.21	3.59	5.14	6.07	1.11	1.44	1.52	1.96	2.29	2.54	3.17	3.74	5.10	5.99
		Low	kW	1.02	1.24	1.34	1.57	1.73	1.94	2.47	2.95	3.88	4.00	0.97	1.22	1.24	1.55	1.70	1.92	2.44	3.06	3.84	3.96
	Sensible capacity	High	kW	1.16	1.25	1.37	1.82	2.05	2.69	3.05	3.55	4.73	5.72	1.10	1.22	1.41	1.79	2.01	2.61	2.99	3.47	4.67	5.61
		Medium	kW	0.94	1.10	1.20	1.53	1.66	1.99	2.39	2.85	3.70	4.46	0.87	1.07	1.18	1.50	1.62	1.96	2.36	2.80	3.67	4.40
		Low	kW	0.77	0.93	0.98	1.15	1.23	1.41	1.76	2.27	2.75	2.94	0.73	0.91	0.96	1.14	1.21	1.40	1.74	2.23	2.73	2.91
Heating capacity (standard conditions)	High		kW	1.82	1.84	2.15	2.70	2.94	4.05	4.24	4.98	6.49	8.37	1.66	1.76		2.53	2.68	4.20	3.82	4.64	6.97	7.35
	Medium		kW	1.48	1.72	1.81	2.26	2.37	3.13	3.24	4.08	5.17	6.53	1.49	1.56		2.18	2.31	3.47	3.22	4.07	6.02	6.29
	Low		kW	1.21	1.45	1.50	1.74	1.76	2.39	2.47	3.31	3.97	4.39	1.31	1.36		1.78	1.88	2.82	2.73	3.55	5.02	4.85
Power input	High		kW	0.037	0.053		0.057	0.056	0.065	0.098		0.182	0.244	0.037	0.053		0.057	0.056	0.065	0.098		0.182	0.244
	Medium		kW	0.03	0.04				0.05	0.06	0.07	0.13	0.17	0.03	0.04				0.05	0.06	0.07	0.13	0.17
	Low		kW	0.02	0.03	0.02	0.03		0.04		0.05	0.09	0.11	0.02	0.03	0.02	0.03		0.04		0.05	0.09	0.11
Dimensions	Unit	HeightxWidthxLength	mm	535x584x224			535x794x224		535x1,000x224			535x1,210x249		535x584x224			535x794x224		535x1,000x224			535x1,210x249	
Weight	Unit		kg	16.5		16.9	21.4	22.1	26.3	26.4	26.6	35.4		16.5		16.9	21.4	22.1	26.3	26.4	26.6	35.4	
Air filter	Type			Polypropylene net																			
Fan	Type			Centrifugal																			
	Quantity			1			2							1			2						
	Air flow rate	High	m^3/h	319	344		442		640	706	785	1,011	1,393	307	330	327	432	431	628	690	763	998	1,362
		Medium	m^3/h	233	271		341		450	497	605	771	1,022	225	261		334	332	444	490	593	765	1,007
		Low	m^3/h	178	211		241		320	361	470	570	642	174	205		238	237	316	356	460	565	636
Total sound power level	High		dBA	47.0	49.0	50.0	48.0		52.0	53.0	56.0	61.0	67.0	45.0	49.0	50.0	48.0	47.0	53.0	56.0	58.0	60.0	66.0
	Medium		dBA	42.0	44.0		43.0	42.0	43.0		49.0	54.0	60.0	39.0	44.0		43.0	41.0	45.0	46.0	53.0	54.0	58.0
	Low		dBA	37.0	38.0	40.0	35.0	36.0	35.0		43.0	47.0	49.0	33.0	40.0	38.0	34.0	33.0	36.0	39.0	48.0	46.0	48.0
Sound pressure level	High		dBA	42.0	44.0	45.0	43.0		47.0	48.0	51.0	56.0	62.0	40.0	44.0	45.0	43.0	42.0	46.0	51.0	54.0	55.0	61.0
	Medium		dBA	37.0	39.0		38.0	37.0	38.0		44.0	49.0	55.0	34.0	39.0		38.0	36.0	38.0	41.0	48.0	49.0	53.0
	Low		dBA	32.0	33.0	35.0	30.0	31.0	30.0		38.0	42.0	44.0	28.0	33.0		29.0	28.0	29.0	32.0	43.0	41.0	43.0
Electric heater	Power input (Optional)		kW	1.0	1.5		1.6		2.0			3.0		1.0	1.5		1.6		2.0			3.0	
Piping connections	Drain	OD	mm	16																			
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230																			
Control systems	Wired remote control			FWEC3A/FWEDA/SHINKA/FWEC2T/4T																			

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

Concealed flexi type unit with low ESP

- AC fan motor unit for horizontal or vertical concealed mounting
- Low unit casing height of 200mm
- Sirocco Fan leading to low noise operation
- Open control
- Factory mounted valve combinations
- Increased flexibility of capacity setting in the field
- The air filter can easily be removed for cleaning

FWE-DT/DF

FWEC2T/4T

FWEC1,2,3A

FWEDA

SHINKA TOUCH/
SHINKA ZONE

FWE-DT FWE-DF

Indoor unit			FWE-DT/FWE-DF	03	04	05	06	07	08	10	11	03	04	05	06	07	08	10	11
				2-pipe								4-pipe							
Cooling capacity (standard conditions)	Total capacity	High	kW	1.94	2.06	2.58	3.12	3.43	3.92	5.22	5.6	1.94	2.06	2.58	3.12	3.42	3.92	5.22	5.6
		Medium	kW	1.6	1.64	2	2.4	2.79	3.66	4.19	4.41	1.6	1.64	2	2.4	2.79	3.66	4.19	4.41
		Low	kW	1.22	1.4	1.64	2.01	2.41	2.77	3.1	3.39	1.22	1.4	1.64	2.01	2.42	2.77	3.1	3.39
		Fan speed 1	kW	1.22	1.21	1.33	1.24	2.07	2.38	2.57	2.81	1.22	1.21	1.33	1.24	2.07	3.22	2.57	2.81
	Sensible capacity	High	kW	1.59	1.69	2.11	2.56	2.81	3.22	4.28	4.59	1.59	1.69	2.11	2.56	2.81	3.22	4.28	4.59
		Medium	kW	1.31	1.34	1.64	1.97	2.28	3	3.44	3.61	1.31	1.34	1.64	1.97	2.28	3	3.44	3.61
		Low	kW	1	1.15	1.35	1.64	1.98	2.27	2.54	2.78	1	1.15	1.35	1.64	1.98	2.27	2.54	2.78
		Fan speed 1	kW	1	0.99	1.09	1.02	1.7	1.95	2.11	2.3	1	0.99	1.09	1.02	1.7	1.95	2.11	2.3
	Latent capacity	High	kW	0.35	0.37	0.46	0.56	0.62	0.71	0.94	1.01	0.35	0.37	0.46	0.56	0.62	0.71	0.94	1.01
		Medium	kW	0.32	0.34	0.43	0.49	0.58	0.66	0.86	0.92	0.32	0.34	0.43	0.49	0.58	0.66	0.86	0.92
Heating capacity (standard conditions)	Capacity	High	kW	2	2.38	2.89	4	4.37	4.64	5.98	6.35	2.11	2.61	2.94	3.84	4.57		5.83	6.18
		Medium	kW	1.69	1.99	2.32	3.36	3.6	4.39	4.96	5.17	1.81	2.37	2.58	3.09	3.93	4.34	4.87	5.07
		Low	kW	1.34	1.78	1.98	2.94	3.15	3.56	3.89	4.17	1.47	2.23	2.36	2.69	3.57		3.87	4.14
		Fan speed 1	kW	1.34	1.6	1.68	2.13	2.74	3.2	3.37	3.6	1.47	2.11	2.16	1.91	3.22		3.39	3.6
Power input	High		kW	0.03	0.03	0.04	0.06	0.07		0.10	0.11	0.03	0.03	0.04	0.06	0.07		0.10	0.11
	Medium		kW	0.03			0.05		0.06			0.03			0.05		0.06		
	Low		kW	0.03			0.04					0.03			0.04				
	Fan speed 1		kW	0.03			0.04	0.03				0.03			0.04	0.03			
Dimensions	Unit	Height	mm	200															
		Width	mm	795			995	1,200				795			995	1,200			
		Depth	mm	610															
	Packed unit	Height	mm	205															
		Width	mm	925			1,125	1,325				925			1,125	1,325			
		Depth	mm	745															
Weight	Unit		kg	17.5	18.5		22	25.5				18	19		22.5	26			
	Packed unit		kg	20	21		25	29				21	22		26	30			
Casing	Colour			Metal															
	Material			Galvanised sheet metal															
Air filter	Type			Plastic Frame / PP Filter Net (G1)															
Fan	Type			Sirocco fan															
	Quantity			2			3	4				2			3	4			
	Air flow rate	High	m^3/h	407	385	488	677	725		1,032	1,116	407	385	488	677	725		1,032	1,116
		Medium	m^3/h	326	306	374	527	570	669	798	846	326	306	374	527	570	669	798	846
		Low	m^3/h	235	263	304	446	481		555	619	235	263	304	446	481		555	619
		Fan speed 1	m^3/h	235	227	243	290	397		436	489	235	227	243	290	397		436	489
Total sound power level	High		dBA	45	44		50			57	59	45	44		50			57	59
	Medium		dBA	39	38	41	44	42	46	51	52	39	38	41	44	42	46	51	52
	Low		dBA	33	34	37	39	34		43	44	33	34	37	39	34		43	44
	Fan speed 1		dBA	33			30	31		38	40	33			30	31		38	40
Water flow	Cooling	High	l/h	334	354	443	536	589	674	897	962	334	354	443	536	589	674	897	962
		Medium	l/h	275	282	343	412	479	630	720	757	275	282	343	412	479	630	720	757
		Low	l/h	210	241	282	345	415	477	534	583	210	241	282	345	415	477	534	583
		Fan speed 1	l/h	210	209	228	213	354	409	442	483	210	209	228	213	354	409	442	483
	Heating	High	l/h	344	409	496	689	751	797	1,029	1,092	182	225	253	330	393		502	531
		Medium	l/h	290	343	400	577	618	755	852	888	156	203	222	266	338	374	419	436
		Low	l/h	230	306	341	505	542	613	669	717	126	192	203	231	307		333	356
		Fan speed 1	l/h	126	182	186	164	277		291	310	230	275	289	366	471	550	579	620
Piping connections	Drain	OD	mm	17.3															
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230															
Current input	High		A	0.01		0.02	0.03	0.02		0.04	0.05	0.01		0.02	0.03	0.02		0.04	0.05
	Medium		A	0.01			0.02				0.04	0.01			0.02				0.04
	Low		A	0.01			0.02			0.01	0.03	0.01			0.02			0.01	0.03
Control systems	Wired remote control			FWEC3A/FWEDA/SHINKA/FWEC2T/4T															

Heating: indoor temp. 20°CDB, 15°CWB; entering water temp. 65°C, water temperature drop 10K. | Heating: indoor temp. 20°CDB, 15°CWB; entering water temp. 45°C, water temperature drop 5K. | Inlet/outlet water temperature 7/12 °C; inlet air temperature 27°C DB 19°C WB

Concealed ceiling unit with low ESP

- AC fan motor unit for horizontal concealed mounting
- Easy installation and maintenance
- 4-speed fan motor
- Wired electronic controllers range
- Available static pressure up to 80Pa
- Wide operating range
- Standard left and right side water connection
- Additional drain pan as standard
- G2 plastic frame filter (optional)
- Open protocol control
- Factory mounted valve available as option
- Reduced sound noise thanks to the thinner heat exchanger

Indoor Unit			**FWE-FF**	**04FF**	**05FF**	**06FF**	**08FF**	**10FF**	**12FF**	**14FF**	**16FF**	**20FF**	**24FF**
Cooling capacity (standard conditions)	Total capacity 4-pipe	High	kW	2.01 (1)	2.40 (1)	3.40 (1)	4.20 (1)	4.69 (1)	5.39 (1)	6.97 (1)	7.98 (1)	10.00 (1)	11.30 (1)
		Medium	kW	1.69 (1)	1.99 (1)	3.04 (1)	3.31 (1)	4.18 (1)	4.84 (1)	6.60 (1)	7.19 (1)	8.51 (1)	10.13 (1)
		Low	kW	1.37 (1)	1.61 (1)	2.29 (1)	2.19 (1)	3.28 (1)	3.35 (1)	5.77 (1)	5.81 (1)	6.79 (1)	7.51 (1)
		Fan speed 1	kW	0.90 (1)	1.10 (1)	1.76 (1)	1.30 (1)	2.21 (1)	2.25 (1)	4.79 (1)	5.03 (1)	5.50 (1)	6.09 (1)
	Sensible capacity 4-pipe	High	kW	1.56 (1)	1.93 (1)	2.74 (1)	3.28 (1)	3.71 (1)	4.27 (1)	5.63 (1)	6.63 (1)	8.28 (1)	9.47 (1)
		Medium	kW	1.29 (1)	1.57 (1)	2.43 (1)	2.48 (1)	3.24 (1)	3.79 (1)	5.10 (1)	5.85 (1)	6.88 (1)	8.47 (1)
		Low	kW	1.02 (1)	1.21 (1)	1.83 (1)	1.62 (1)	2.54 (1)	2.58 (1)	4.24 (1)	4.35 (1)	5.28 (1)	5.91 (1)
		Fan speed 1	kW	0.67 (1)	0.81 (1)	1.37 (1)	0.95 (1)	1.65 (1)	1.69 (1)	3.51 (1)	3.72 (1)	4.17 (1)	4.67 (1)
	Latent capacity 4-pipe	High	kW	0.45 (1)	0.47 (1)	0.66 (1)	0.92 (1)	0.99 (1)	1.12 (1)	1.34 (1)	1.35 (1)	1.72 (1)	1.82 (1)
Heating capacity (standard conditions)	Capacity 4-pipe	High	kW	2.38 (2)	2.45 (2)	3.23 (2)	4.80 (2)	5.20 (2)	6.45 (2)	6.75 (2)	7.60 (2)	9.60 (2)	11.10 (2)
		Medium	kW	2.00 (2)	2.06 (2)	2.90 (2)	3.79 (2)	4.43 (2)	5.47 (2)	6.15 (2)	6.75 (2)	7.94 (2)	10.00 (2)
		Low	kW	1.66 (2)	1.72 (2)	2.21 (2)	2.65 (2)	3.33 (2)	3.50 (2)	4.93 (2)		5.84 (2)	6.98 (2)
		Fan speed 1	kW	1.21 (2)	1.25 (2)	1.72 (2)	1.82 (2)	2.27 (2)	2.38 (2)	3.65 (2)		4.14 (2)	4.97 (2)
Power input	High		kW	0.054 (3)		0.076 (3)	0.094 (3)	0.109 (3)	0.122 (3)	0.170 (3)	0.189 (3)	0.176 (3)	0.224 (3)
	Medium		kW	0.04 (3)		0.06 (3)	0.07 (3)	0.08 (3)		0.14 (3)		0.13 (3)	0.15 (3)
	Low		kW	0.04 (3)		0.05 (3)	0.06 (3)	0.07 (3)		0.12 (3)		0.11 (3)	0.13 (3)
Casing	Colour			Metal									
Decoration panel	Dimensions	Unit HeightxWidthxDepth	mm	253x728x570			253x1,087x570			253x1,362x570		253x1,677x570	
Fan	Type			Centrifugal (Blade: Forward - curve)									
	Air flow rate	High	m^3/h	465 (3)		638 (3)	854 (3)	931 (3)	1,082 (3)	1,467 (3)	1,692 (3)	1,707 (3)	1,990 (3)
		Medium	m^3/h	379 (3)		555 (3)	668 (3)	805 (3)	931 (3)	1,314 (3)	1,467 (3)	1,382 (3)	1,751 (3)
		Low	m^3/h	307 (3)		400 (3)	467 (3)	620 (3)		1,021 (3)		1,001 (3)	1,184 (3)
		Fan speed 1	m^3/h	216 (3)		301 (3)	325 (3)	436 (3)		730 (3)		714 (3)	855 (3)
Total sound power level	High		dBA	49.0 (4)	50.0 (4)	59.0 (4)	55.0 (4)	57.0 (4)	61.0 (4)		64.0 (4)	59.0 (4)	64.0 (4)
	Medium		dBA	45.0 (4)		56.0 (4)	49.0 (4)	54.0 (4)	58.0 (4)		61.0 (4)	54.0 (4)	61.0 (4)
	Low		dBA	40.0 (4)		48.0 (4)	41.0 (4)	49.0 (4)		52.0 (4)		48.0 (4)	51.0 (4)
	Fan speed 1		dBA	32.0 (4)	33.0 (4)	41.0 (4)	35.0 (4)	43.0 (4)		45.0 (4)		43.0 (4)	44.0 (4)
Sound pressure level	High		dBA	38.0 (5)	39.0 (5)	48.0 (5)	44.0 (5)	46.0 (5)	50.0 (5)		53.0 (5)	48.0 (5)	53.0 (5)
	Medium		dBA	34.0 (5)		45.0 (5)	38.0 (5)	43.0 (5)	47.0 (5)		50.0 (5)	43.0 (5)	50.0 (5)
	Low		dBA	29.0 (5)		37.0 (5)	30.0 (5)	38.0 (5)		41.0 (5)		37.0 (5)	40.0 (5)
	Fan speed 1		dBA	21.0 (5)	22.0 (5)	30.0 (5)	24.0 (5)	32.0 (5)		34.0 (5)		32.0 (5)	33.0 (5)
Water flow	Cooling	High	l/h	346 (1)	413 (1)	585 (1)	722 (1)	807 (1)	927 (1)	1,198 (1)	1,372 (1)	1,719 (1)	1,943 (1)
		Medium	l/h	291 (1)	342 (1)	522 (1)	569 (1)	718 (1)	832 (1)	1,135 (1)	1,237 (1)	1,464 (1)	1,742 (1)
		Low	l/h	236 (1)	277 (1)	394 (1)	377 (1)	563 (1)	576 (1)	992 (1)	998 (1)	1,168 (1)	1,292 (1)
		Fan speed 1	l/h	155 (1)	189 (1)	303 (1)	224 (1)	380 (1)	388 (1)	823 (1)	865 (1)	947 (1)	1,047 (1)
	Heating	High	l/h	504 (2)	517 (2)	686 (2)	919 (2)	995 (2)	1,233 (2)	1,277 (2)	1,420 (2)	1,790 (2)	2,073 (2)
Water flow	Heating	Medium	l/h	424 (2)	435 (2)	615 (2)	753 (2)	847 (2)	1,045 (2)	1,171 (2)	1,277 (2)	1,504 (2)	1,890 (2)
		Low	l/h	353 (2)	361 (2)	469 (2)	547 (2)	637 (2)	669 (2)	948 (2)		1,142 (2)	1,344 (2)
		Fan speed 1	l/h	256 (2)	262 (2)	365 (2)	384 (2)	434 (2)	456 (2)	700 (2)		849 (2)	954 (2)

(1)Inlet/outlet water temperature 7/12 °C; inlet air temperature 27°C DB 19°C WB | (2)Heating: indoor temp. 20°CDB, 15°CWB; entering water temp. 45°C, water temperature drop 5K. | (3)Airflow value measurements are performed at 20°C(DB)/15°C(WB) condition. | (4)Sound power level according to ISO3741 | (5)The sound pressure level is measured via a microphone at 1m distance of the unit.

FWE-FT FWE-FF

Indoor Unit				FWE-FT	04FT	05FT	06FT	08FT	10FT	12FT	14FT	16FT	20FT	24FT
Cooling capacity (standard conditions)	Total capacity 2-pipe	High	kW		2.10 (1)	2.50 (1)	3.45 (1)	4.40 (1)	4.81 (1)	5.60 (1)	7.06 (1)	8.05 (1)	10.30 (1)	11.50 (1)
		Medium	kW		1.75 (1)	2.10 (1)	3.13 (1)	3.60 (1)	4.30 (1)	5.06 (1)	6.69 (1)	7.38 (1)	8.84 (1)	10.48 (1)
		Low	kW		1.40 (1)	1.70 (1)	2.39 (1)	2.40 (1)	3.40 (1)	3.50 (1)	5.90 (1)	5.98 (1)	7.08 (1)	7.90 (1)
		Fan speed 1	kW		0.90 (1)	1.10 (1)	1.81 (1)	1.35 (1)	2.31 (1)	2.32 (1)	4.98 (1)	5.01 (1)	5.72 (1)	6.30 (1)
	Sensible capacity 2-pipe	High	kW		1.68 (1)	2.06 (1)	2.84 (1)	3.38 (1)	3.89 (1)	4.53 (1)	5.81 (1)	6.82 (1)	8.72 (1)	9.86 (1)
		Medium	kW		1.36 (1)	1.69 (1)	2.53 (1)	2.77 (1)	3.42 (1)	4.09 (1)	5.37 (1)	6.14 (1)	7.31 (1)	8.97 (1)
		Low	kW		1.08 (1)	1.31 (1)	1.92 (1)	1.82 (1)	2.68 (1)	2.76 (1)	4.56 (1)	4.68 (1)	5.64 (1)	6.37 (1)
		Fan speed 1	kW		0.69 (1)	0.83 (1)	1.44 (1)	1.01 (1)	1.77 (1)	1.78 (1)	3.75 (1)	3.82 (1)	4.44 (1)	4.95 (1)
	Latent capacity 2-pipe	High	kW		0.42 (1)	0.44 (1)	0.61 (1)	1.02 (1)	0.92 (1)	1.07 (1)	1.25 (1)	1.22 (1)	1.58 (1)	1.64 (1)
Heating capacity (standard conditions)	Capacity 2-pipe	High	kW		2.93 (2)	3.00 (2)	3.99 (2)	5.34 (2)	5.78 (2)	7.17 (2)	7.43 (2)	8.26 (2)	10.41 (2)	12.05 (2)
		Medium	kW		2.47 (2)	2.53 (2)	3.58 (2)	4.38 (2)	4.93 (2)	6.08 (2)	6.81 (2)	7.43 (2)	8.75 (2)	10.99 (2)
		Low	kW		2.05 (2)	2.10 (2)	2.73 (2)	3.18 (2)	3.70 (2)	3.89 (2)	5.51 (2)		6.64 (2)	7.82 (2)
		Fan speed 1	kW		1.49 (2)	1.53 (2)	2.13 (2)	2.23 (2)	2.52 (2)	2.65 (2)	4.07 (2)		4.94 (2)	5.55 (2)
Power input	High		kW		0.058 (3)		0.082 (3)	0.096 (3)	0.103 (3)	0.115 (3)	0.222 (3)	0.244 (3)	0.191 (3)	0.298 (3)
	Medium		kW		0.05 (3)		0.06 (3)		0.08 (3)		0.17 (3)		0.12 (3)	0.21 (3)
	Low		kW		0.04 (3)		0.05 (3)		0.06 (3)		0.14 (3)		0.10 (3)	0.17 (3)
Dimensions	Unit	HeightxWidthxDepth	mm		253x728x570			253x1,090x570			253x1,360x570		253x1,680x570	
Casing	Colour				Metal									
Fan	Type				Centrifugal (Blade: Forward - curve)									
	Air flow rate	High	m^3/h		492 (3)		683 (3)	949 (3)	989 (3)	1,155 (3)	1,534 (3)	1,776 (3)	1,812 (3)	2,090 (3)
		Medium	m^3/h		398 (3)		592 (3)	734 (3)	850 (3)	989 (3)	1,368 (3)	1,534 (3)	1,455 (3)	1,831 (3)
		Low	m^3/h		319 (3)		421 (3)	503 (3)	646 (3)		1,052 (3)		1,036 (3)	1,220 (3)
		Fan speed 1	m^3/h		218 (3)		312 (3)	338 (3)	444 (3)		738 (3)		720 (3)	864 (3)
Total sound power level	High		dBA		49.0 (4)	50.0 (4)	58.0 (4)	54.0 (4)	57.0 (4)	61.0 (4)	60.0 (4)	64.0 (4)	58.0 (4)	64.0 (4)
	Medium		dBA		44.0 (4)		56.0 (4)	48.0 (4)	54.0 (4)	57.0 (4)	58.0 (4)	60.0 (4)	53.0 (4)	60.0 (4)
	Low		dBA		39.0 (4)		47.0 (4)	40.0 (4)	48.0 (4)		51.0 (4)		47.0 (4)	50.0 (4)
	Fan speed 1		dBA		31.0 (4)		40.0 (4)	34.0 (4)	42.0 (4)		44.0 (4)		42.0 (4)	43.0 (4)
Sound pressure level	High		dBA		38.0 (5)	39.0 (5)	47.0 (5)	43.0 (5)	46.0 (5)	50.0 (5)	49.0 (5)	53.0 (5)	47.0 (5)	53.0 (5)
	Medium		dBA		33.0 (5)	34.0 (5)	45.0 (5)	37.0 (5)	43.0 (5)	46.0 (5)	47.0 (5)	49.0 (5)	42.0 (5)	49.0 (5)
	Low		dBA		28.0 (5)		36.0 (5)	29.0 (5)	37.0 (5)		40.0 (5)		36.0 (5)	39.0 (5)
	Fan speed 1		dBA		20.0 (5)		29.0 (5)	23.0 (5)	31.0 (5)		33.0 (5)		31.0 (5)	32.0 (5)
Water flow	Cooling	High	l/h		361 (1)	430 (1)	592 (1)	757 (1)	827 (1)	964 (1)	1,213 (1)	1,384 (1)	1,771 (1)	1,978 (1)
		Medium	l/h		301 (1)	361 (1)	538 (1)	618 (1)	740 (1)	870 (1)	1,151 (1)	1,270 (1)	1,519 (1)	1,802 (1)
		Low	l/h		241 (1)	292 (1)	410 (1)	413 (1)	584 (1)	602 (1)	1,014 (1)	1,029 (1)	1,217 (1)	1,359 (1)
		Fan speed 1	l/h		155 (1)	189 (1)	311 (1)	232 (1)	396 (1)	399 (1)	857 (1)	861 (1)	983 (1)	1,083 (1)
	Heating	High	l/h		504 (2)	517 (2)	686 (2)	919 (2)	995 (2)	1,233 (2)	1,277 (2)	1,420 (2)	1,790 (2)	2,073 (2)
Water flow	Heating	Medium	l/h		424 (2)	435 (2)	615 (2)	753 (2)	847 (2)	1,045 (2)	1,171 (2)	1,277 (2)	1,504 (2)	1,890 (2)
		Low	l/h		353 (2)	361 (2)	469 (2)	547 (2)	637 (2)	669 (2)	948 (2)		1,142 (2)	1,344 (2)
		Fan speed 1	l/h		256 (2)	262 (2)	365 (2)	384 (2)	434 (2)	456 (2)	700 (2)		849 (2)	954 (2)

(1)Inlet/outlet water temperature 7/12 °C; inlet air temperature 27°C DB 19°C WB | (2)Heating: indoor temp. 20°CDB, 15°CWB; entering water temp. 45°C, water temperature drop 5K. | (3)Airflow value measurements are performed at 20°C(DB)/15°C(WB) condition. | (4)Sound power level according to ISO3741 | (5)The sound pressure level is measured via a microphone at 1m distance of the unit.

Concealed ceiling unit with medium ESP

- BLDC fan motor unit for horizontal concealed mounting. Continuous air flow regulation and fan speed modulation
- Available in District Cooling version for both 2 and 4 pipe applications
- Up to 50% energy savings with brush-less DC motor technology compared to traditional technology
- Instant adjustment to temperature and relative humidity changes
- Low operating sound level
- Highly flexible solutions: multiple sizes, piping topologies and connection valves
- Heat exchanger up to 4 rows
- Available static pressure up to 80Pa at maximum speed

FWP-CT/CF

FWEC10

FWEC3A

FWEDA

SHINKA TOUCH/ SHINKA ZONE

FWP-CT FWP-CF

Indoor unit	FWP-CT/CF	04			05			06			08			10			11			15			17		
		2-pipe																							
Speed		min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max
Declared speed			2,5,7			1,5,7			1,6,7			1,4,7			1,6,7			1,6,7			5,6,7			5,6,7	
Control voltage (E)	V	2.90	8.00	9.00	4.30	7.50	8.40	4.50	7.40	8.30	5.40	8.30	9.90	3.40	7.60	8.50	3.40	7.60	8.50	6.80	7.50	8.30	6.80	7.50	8.30
Rated air flow (E)	m^3/h	109	246	276	171	275	341	195	360	402	305	532	652	333	687	760	333	687	760	1,050	1,163	1,289	1,050	1,163	1,289
Available static pressure (E)	Pa	10	50	63	19	50	77	19	50	63	17	50	75	12	50	61	12	50	61	40	50	60	40	50	60
Power input (E)	W	6	25	33	10	24	39	10	26	35	22	51	77	11	54	68	11	54	68	105	128	162	105	128	162
Maximum current absorption	A		0.32			0.60			0.84			0.84			0.91			0.91			3.52			3.52	
Total cooling capacity (1)(E)	kW	0.93	1.76	1.95	1.29	1.95	2.34	1.59	2.74	3.04	1.98	3.26	3.79	2.29	4.34	4.75	2.51	4.91	5.35	6.28	6.81	7.38	7.04	7.64	8.28
Sensible cooling capacity (1)(E)	kW	0.62	1.25	1.39	0.91	1.39	1.66	1.09	1.91	2.11	1.48	2.48	2.92	1.67	3.21	3.51	1.77	3.45	3.76	4.64	5.03	5.46	4.96	5.38	5.84
FCEER class (E)		A																		C			B		
Water flow (2)	l/h	161	306	340	222	339	408	274	476	527	343	568	664	394	753	828	432	850	930	1,094	1,190	1,295	1,225	1,332	1,448
Water pressure drop (2)(E)	kPa	2	5	6	3	6	8	3	7	9	3	8	11	2	7	8	3	10	12	13	16	18	20	23	-
Heating capacity (3)(E)	kW	0.88	1.21	1.99	1.33	1.98	2.35	1.59	2.80	3.10	2.35	3.71	4.31	2.54	4.76	5.17	2.63	5.03	5.49	6.68	7.22	7.80	7.18	7.80	8.46
FCCOP class (E)		A																		B					
Water flow (3)	l/h	153	315	346	231	345	408	276	488	538	408	644	749	441	827	898	457	875	955	1,162	1,256	1,356	1,248	1,355	1,471
Water pressure drop (3)(E)	kPa	1	4	5	2	5	7	2	6	8	4	9	11	2	7	8	3	9	11	12	14	16	17	19	22
Standard coil - number of rows			3			3			4			3			3			4			3			4	
Total sound power level (4)	dB(A)	28	49	52	39	50	54	39	50	54	38	52	58	38	55	58	38	55	58	61	63	69	61	63	69
Inlet + radiated sound power level (4)(E)	dB(A)	26	47	50	37	48	52	37	48	52	36	50	56	36	53	56	36	53	56	59	61	67	59	61	67
Outlet sound power level (4)(E)	dB(A)	25	46	49	36	47	51	36	47	51	35	49	55	35	52	55	35	52	55	58	60	66	58	60	66
Water content - standard coil	dm^3		1.20			1.20			2.20			1.60			2.50			3.30			2.50			3.30	
Cross-section area of power cables (5)	mm^2		1.00			1.00			1.00			1.00			1.00			1.00			1.50			1.50	
		4-pipe																							
Speed		min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max
Declared speed			2,5,7			1,5,7			1,6,7			1,4,7			1,6,7			1,6,7			5,6,7			5,6,7	
Control voltage (E)	V	2.90	7.90	8.90	4.50	7.30	8.90	4.50	7.40	8.30	5.40	8.30	9.90	3.40	7.60	8.50	3.40	7.60	8.50	6.80	7.50	8.30	6.80	7.50	8.30
Rated air flow (E)	m^3/h	109	243	270	170	272	336	195	357	398	302	524	642	333	683	755	333	683	755	1,050	1,163	1,289	1,050	1,163	1,289
Available static pressure (E)	Pa	10	50	63	19	50	77	19	50	63	17	50	75	12	50	61	12	50	61	40	50	60	40	50	60
Power input (E)	W	6	25	32	10	23	39	10	26	35	21	50	77	11	54	67	11	54	67	105	128	162	105	128	162
Maximum current absorption	A		0.32			0.60			0.84			0.84			0.91			0.91			3.52			3.52	
Total cooling capacity (1)(E)	kW	0.93	1.74	1.91	1.28	1.93	2.31	1.59	2.72	3.01	1.95	3.22	3.75	2.29	4.32	4.72	2.51	4.88	5.32	6.28	6.81	7.38	7.04	7.64	8.28
Sensible cooling capacity (1)(E)	kW	0.62	1.24	1.36	0.90	1.38	1.64	1.09	1.89	2.09	1.47	2.44	2.89	1.67	3.19	3.48	1.77	3.43	3.74	4.64	5.03	5.46	4.96	5.38	5.84
FCEER class (E)			A			A			A			A			A			A			C			B	
Water flow (2)	l/h	161	302	333	221	335	404	274	473	522	339	562	656	394	749	822	432	846	925	1,094	1,190	1,295	1,225	1,332	1,448
Water pressure drop (2)(E)	kPa	2	5	6	3	6	8	3	7	9	3	8	11	2	7	8	3	10	12	13	16	18	20	23	26
Heating capacity (3)(E)	kW	1.14	1.93	2.06	1.55	2.07	2.32	2.09	3.09	3.29	2.80	3.82	4.24	3.40	5.17	5.45	3.40	5.17	5.45	6.42	6.73	7.06	6.42	6.73	7.06
FCCOP class (E)			A			A			A			A			A			A			C			C	
Water flow (3)	l/h	100	169	180	136	181	204	183	271	288	245	334	371	297	452	477	297	452	477	562	589	618	562	589	618
Water pressure drop (3)(E)	kPa	1	2	3	2	3	3	2	3	4	3	5	6	6	13	14	6	13	14	19	21	22	19	21	22
Total sound power level (4)		28	49	52	39	50	54	39	50	54	38	52	58	38	55	58	38	55	58	61	63	69	61	63	69
Standard coil - number of rows	dB(A)		3+1			3+1			4+1			3+1			3+1			4+1			3+1			4+1	
Inlet + radiated sound power level (4)(E)	dB(A)	26	47	50	37	48	52	37	48	52	36	50	56	36	53	56	36	53	56	59	61	67	59	61	67
Outlet sound power level (4)(E)	dB(A)	25	46	49	36	47	51	36	47	51	35	49	55	35	52	55	35	52	55	58	60	66	58	60	66
Water content - standard coil	dm^3		0.47			0.47			0.59			0.59			0.97			0.97			0.97			0.97	
Cross-section area of power cables (5)	mm^2		1.00			1.00			1.00			1.00			1.00			1.00			1.50			1.50	
Power supply cable type		N07V-K																							
Safety fuse F	A		1			1			1			1			1			1			2			2	
Fuses type		gG																							
Power supply	Phase/Frequency Hz	1~/50																							
Control systems	Wired remote control	FWEC3A/FWEDA/SHINKA/FWEC10																							

(1) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) according to EN1397:2015 | (2) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) | (3) Water temperature 45°C / 40°C, air temperature 20°C | (4) Sound power measured according to standards ISO 3741 and ISO 3742 | (5) Sound pressure measured at a distance of 4 m in a free field with a directivity factor of 1 | (E) EUROVENT certified data

Concealed ceiling unit with medium ESP

- AC fan motor unit for horizontal concealed mounting
- Compact dimensions, can easily be mounted in a narrow ceiling void
- Heat exchanger up to 4 rows
- Drain pan to collect the condensate from: heat exchanger and regulating valves -reversible water connections
- The air filter can easily be removed for cleaning
- Available static pressure up to 80Pa at maximum speed

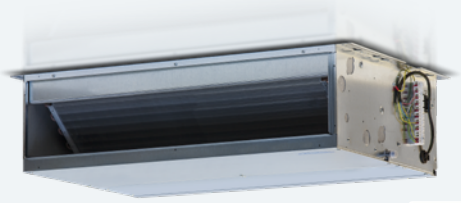

FWB-CT/CF

FWEC2T/4T

FWEC1,2,3A

FWEDA

SHINKA TOUCH/ SHINKA ZONE

FWB-CT FWB-CF

Indoor unit	FWB-CT/CF	04			05			06			08			10			11			15			17		
2-pipe																									
Speed		min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max
Declared speed			2,5,7			1,5,7			1,6,7			1,4,7			1,6,7			1,6,7			5,6,7			5,6,7	
Rated air flow (E)	m^3/h	109	246	276	171	275	341	195	360	402	305	532	652	333	687	760	333	687	760	1,050	1,163	1,289	1,050	1,163	1,289
Available static pressure (E)	Pa	10	50	63	19	50	77	19	50	63	17	50	75	12	50	61	12	50	61	40	50	60	40	50	60
Power input (E)	W	24	57	82	34	69	106	34	85	106	76	143	192	76	167	192	76	167	192	235	280	332	235	280	332
Maximum current absorption	A		0.40			0.56			0.56			1.10			1.10			1.10			2.10			2.10	
Total cooling capacity (1)(E)	kW	0.92	1.72	1.90	1.27	1.90	2.27	1.57	2.69	2.96	1.92	3.17	3.68	2.22	4.22	4.63	2.44	4.79	5.23	6.15	6.66	7.21	6.91	7.49	8.12
Sensible cooling capacity (1)(E)	kW	0.61	1.21	1.34	0.89	1.34	1.59	1.07	1.86	2.03	1.42	2.39	2.81	1.60	3.09	3.39	1.70	3.33	3.64	4.51	4.88	5.29	4.83	5.23	5.67
FCEER class (E)						D						E						D							
Water flow (1)	l/h	160	306	340	222	339	408	274	476	527	343	568	664	394	753	828	432	850	930	1,095	1,191	1,295	1,225	1,333	1,448
Water pressure drop (2)(E)	kPa	2	5	6	3	6	8	3	7	9	3	8	11	2	7	8	3	10	12	13	16	18	20	23	26
Heating capacity (3)(E)	kW	0.88	1.81	1.99	1.33	1.98	2.35	1.59	2.80	3.10	2.35	3.71	4.31	2.54	4.76	5.17	2.63	5.03	5.49	6.68	7.22	7.80	7.18	7.80	8.46
FCCOP class (E)												D													
Water flow (3)	l/h	153	315	346	231	345	408	276	488	538	408	644	749	442	827	898	457	875	955	1,162	1,256	1,357	1,248	1,356	1,472
Water pressure drop (3)(E)	kPa	1	4	5	2	5	7	2	6	8	4	9	11	2	7	8	3	9	11	12	14	16	17	20	23
Standard coil - number of rows			3			3			4			3			3			4			3			4	
Total sound power level (4)	dB(A)	28	49	52	39	50	54	39	50	54	38	52	58	38	55	58	38	55	58	61	63	69	61	63	69
Inlet + radiated sound power level (4)(E)	dB(A)	26	47	50	37	48	52	37	48	52	37	50	58	36	53	56	36	53	56	59	61	67	59	61	67
Outlet sound power level (4)(E)	dB(A)	25	46	49	36	47	51	36	47	51	35	47	56	35	52	55	35	52	55	58	60	66	58	60	66
Water content - standard coil	dm^3		1.20			1.20			1.60			1.60			2.50			3.30			2.50			3.30	
Power supply cable type												N07V-K													
Cross-section area of power cables (5)	mm^2		1.00			1.00			1.00			1.50			1.50			1.50			1.50			1.50	
Safety fuse F	A		1			1			1			2			2			2			2			2	
Fuses type												gG													
Power supply Phase/Frequency	Hz											1~/50													
Control systems Wired remote control												FWEC3A/FWEDA/SHINKA/FWEC2T/4T													
4-pipe																									
Speed		min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max	min	med	max
Declared speed			2,5,7			1,5,7			1,6,7			1,4,7			1,6,7			1,6,7			5,6,7			5,6,7	
Rated air flow (E)	m^3/h	109	243	270	170	272	336	195	357	398	302	524	642	333	683	755	333	683	755	1,050	1,163	1,289	1,050	1,163	1,289
Available static pressure (E)	Pa	10	50	63	19	50	77	19	50	63	17	50	75	12	50	61	12	50	61	40	50	60	40	50	60
Power input (E)	W	24	57	82	34	69	106	34	85	106	76	143	192	76	167	192	76	167	192	235	280	332	235	280	332
Maximum current absorption	A		0.40			0.56			0.56			1.10			1.10			1.10			2.10			2.10	
Total cooling capacity (1)(E)	kW	0.92	1.70	1.86	1.26	1.88	2.24	1.57	2.67	2.93	1.89	3.13	3.64	2.22	4.20	4.60	2.44	4.76	5.20	6.15	6.66	7.21	6.91	7.49	8.12
Sensible cooling capacity (1)(E)	kW	0.61	1.20	1.31	0.88	1.33	1.57	1.07	1.84	2.01	1.41	2.35	2.78	1.60	3.07	3.36	1.70	3.31	3.62	4.51	4.88	5.29	4.83	5.23	5.67
FCEER class (E)						D						E						D							
Water flow (1)	l/h	160	302	333	221	335	404	274	473	522	339	562	656	394	749	822	432	846	925	1,095	1,191	1,295	1,225	1,333	1,448
Water pressure drop (2)(E)	kPa	2	5	6	3	6	8	3	7	9	3	8	11	2	7	8	3	10	12	13	16	18	20	23	26
Heating capacity (3)(E)	kW	1.14	1.93	2.06	1.55	2.07	2.32	2.09	3.09	3.29	2.80	3.82	4.24	3.40	5.17	5.45	3.40	5.17	5.45	6.42	6.73	7.06	6.42	6.73	7.06
FCCOP class (E)			C			D			C			D						D							
Water flow (3)	l/h	100	169	180	136	181	204	183	271	288	245	334	371	297	452	477	297	452	477	562	590	618	562	590	618
Water pressure drop (3)(E)	kPa	1	2	3	2	3	3	2	3	4	3	5	6	6	13	14	6	13	14	19	21	22	19	21	22
Total sound power level		28	49	52	39	50	54	39	50	54	38	52	58	38	55	58	38	55	58	61	63	69	61	63	69
Additional coil - number of rows (4)	dB(A)											1													
Inlet + radiated sound power level (4)(E)	dB(A)	26	47	50	37	48	52	37	48	52	36	50	56	36	53	56	36	53	56	59	61	67	59	61	67
Outlet sound power level (4)(E)	dB(A)	25	46	49	36	47	51	37	48	51	35	49	55	35	52	55	35	52	55	58	60	66	58	60	66
Water content - standard coil	dm^3		0.47						0.59						0.97										

(1) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) according to EN1397:2015 | (2) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) | (3) Water temperature 65°C / 55°C, air temperature 20°C | (4) Sound power measured according to standards ISO 3741 and ISO 3742 | (5) Sound pressure measured at a distance of 4 m in a free field with a directivity factor of 1 | (E) EUROVENT certified data

Concealed ceiling unit with high ESP

- BLDC fan motor unit for horizontal or vertical mounting. Continuous air flow regulation and fan speed modulation
- Up to 70% energy savings with brushless DC motor technology compared to traditional technology
- Instant adjustment to temperature and relative humidity changes
- Low operating sound level
- Highly flexible solutions: multiple sizes, piping topologies and connection valves
- The air filter can easily be removed for cleaning
- Straight duct connector mounted to discharge side
- Available static pressure up to 120Pa at maximum speed

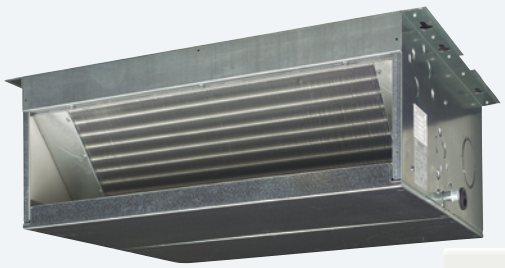

FWN-AT/AF

FWEC10

FWEC3A

FWEDA

SHINKA TOUCH/ SHINKA ZONE

FWN-AT FWN-AF

Indoor unit			FWN-AT/AF	04	05	06	07	08	10	12	16	18	04	05	06	07	08	10	12	16	18
				2-pipe									4-pipe								
Cooling capacity (standard conditions)	Total capacity	High	kW	3.80	4.65	6.01	6.65	7.57	8.49	12.2	16.8	18.6	3.76	4.61	5.91	6.55	7.46	8.35	12.1	16.6	18.6
		Medium	kW	3.47	4.20	5.65	6.25	6.84	7.62	10.4	14.6	16.2	3.44	4.17	5.58	6.17	6.75	7.52	10.3	14.5	16.0
		Low	kW	2.83	3.38	5.22	5.78	6.20	6.84	8.64	12.3	13.6	2.82	3.36	5.17	5.71	6.14	6.77	8.56	12.2	13.6
	Sensible capacity	High	kW	2.98	3.56	4.47	5.04	6.29	6.83	9.66	13.0	14.3	2.98	3.56	4.47	5.04	6.29	6.83	9.50	13.0	14.3
		Medium	kW	2.70	3.19	4.20	4.73	5.60	6.07	8.07	11.2	12.2	2.70	3.19	4.20	4.73	5.60	6.07	7.98	11.1	12.0
		Low	kW	2.19	2.54	3.90	4.35	5.01	5.40	6.58	9.29	10.1	2.19	2.54	3.90	4.35	5.01	5.40	6.51	9.23	9.99
	Latent capacity	High	kW	0.82	1.09	1.54	1.61	1.28	1.66	2.54	3.80	4.30	0.78	1.05	1.44	1.51	1.17	1.52	2.60	3.60	4.30
Heating capacity (standard conditions)		High	kW	4.05	4.83	6.42	7.26	7.88	8.93	12.7	17.3	19.1	3.91	3.89	5.72	5.65	7.99	7.94	14.4	19.3	19.2
		Medium	kW	3.69	4.36	6.03	6.80	7.11	8.04	10.8	15.0	16.4	3.68	3.66	5.51	5.45	7.47	7.44	12.6	17.2	17.0
		Low	kW	3.04	3.55	5.59	6.29	6.47	7.28	9.06	12.7	13.7	3.23	3.23	5.25	5.21	7.02	6.99	10.9	14.9	14.8
Power input	High		kW	0.112		0.152		0.248		0.305	0.445		0.112		0.152		0.248		0.305	0.445	
	Medium		kW	0.07		0.125		0.17		0.22	0.3		0.073		0.125		0.17		0.22	0.345	
	Low		kW	0.04		0.102		0.124		0.14	0.19		0.04		0.102		0.124		0.144	0.223	
FCEER				C	B	C					B	C	C	B	C					B	C
FCCOP				B	A	B		C	B	C	B	C	B	A	B		C	B	C	B	C
Dimensions	Unit	HeightxWidthxLength	mm	559x754 x280		559x964 x280		559x1,174 x280		718 x1,174 x353	718x1,384 x353		559x754 x280		559x964 x280		559x1,174 x280		718 x1,174 x353	718x1,384 x353	
Weight	Unit		kg	32.5	33.3	40.6	41.7	47.3	48.7	65.3	77	79.5	34.7	35.5	43.2	44.4	50.3	51.7	71	83	86
Heat exchanger	Water volume		l	1.29	1.64	1.65	2.13	2.16	2.75	2.99	4.51	5.52	1.29	1.64	1.65	2.13	2.16	2.75	2.99	4.51	5.52
Additional heat exchanger	Water volume		l	-									0.93		1.05		1.17		1.78	2.39	
Air filter	Type			Acrylic - Filtering class EU2																	
Fan	Type			Centrifugal																	
	Quantity			1		2							1		2						
	Air flow rate	High	m^3/h	802	791	1,238	1,203	1,606	1,581	2,376	3,207	3,174	793	783	1,211	1,182	1,576	1,550	2,332	3,187	3,154
		Medium	m^3/h	700	692	1,134	1,107	1,384	1,371	1,898	2,641	2,604	694	686	1,115	1,088	1,362	1,349	1,871	2,626	2,590
		Low	m^3/h	534	532	1,019	1,000	1,207	1,198	1,483	2,092	2,074	531	529	1,005	985	1,192	1,184	1,468	2,083	2,065
Total sound power level	High		dBA	66		69		72		74	78		66		69		72		74	78	
	Medium		dBA	61		63		67			73		61		63		67			73	
	Low		dBA	54		59		61		62	60	69	54		59		61		62	60	69
Sound pressure level	High		dBA	59		58		64		67	69		59		58		64		67	69	
	Medium		dBA	51		55		58		60	66	65	51		55		58		60	66	65
	Low		dBA	46		53		55		53	61		46		53		55		53	61	
Water flow	Cooling	High	l/h	672	828	1,065	1,202	1,346	1,530	2,158	2,936	3,270	666	810	1,040	1,148	1,343	1,524	2,160	2,936	3,270
		Medium	l/h	551	666	989	1,112	1,206	1,350	1,835	2,584	2,831	602	727	978	1,079	1,203	1,350	1,805	2,542	2,786
		Low	l/h	495	581	936	1,040	1,089	1,276	1,516	2,150	2,365	491	584	904	998	1,085	1,207	1,475	2,150	2,389
	Heating	High	l/h	706	850	1,122	1,296	1,373	1,579	2,206	2,988	3,315	342	340	501	496	708		1,278	1,688	
		Medium	l/h	587	694	1,047	1,203	1,239	1,411	1,892	2,640	2,861	322	320	483	477	660		1,104	1,500	1,480
		Low	l/h	531	611	994	1,126	1,128	1,264	1,581	2,211	2,388	283		460	456	619		940	1,309	
Electric heater	Power input (Optional)		kW	2.0		6.0		9.0			12										
Piping connections	Drain	OD	mm	17																	
Water content	Primary coil		dm^3	1.29	1.64	1.65	2.13	2.16	2.75	2.99	4.51	5.52	1.29	1.64	1.65	2.13	2.16	2.75	2.99	4.51	5.52
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230																	
Control systems	Wired remote control			FWEC3A / FWECSA / FWTOUCH / FWEC10																	

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

Concealed ceiling unit with high ESP

- AC fan motor unit for horizontal or vertical concealed mounting
- Quick fixing system for wall or ceiling mounted installation
- Straight duct connector mounted to discharge side
- The air filter can easily be removed for cleaning
- Available static pressure up to 180Pa at maximum speed

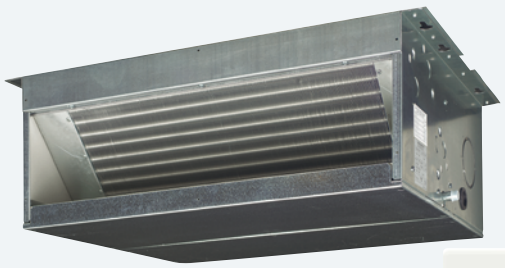

FWD-AT/AF

FWEC2T/4T

FWEC1,2,3A

FWEDA

SHINKA TOUCH/ SHINKA ZONE

FWD-AT FWD-AF

Indoor unit			FWD-AT/AF	04	06	08	10	12	16	18	04	06	08	10	12	16	18
				2-pipe							4-pipe						
Cooling capacity (standard conditions)	Total capacity	High	kW	3.65	5.71	7.33	8.25	11.86	15.92	17.74	3.62	5.60	7.20	8.10	11.66	15.84	17.66
		Medium	kW	3.36	5.39	6.63	7.41	10.12	13.83	15.36	3.33	5.32	6.54	7.31	10.00	13.77	15.29
		Low	kW	2.74	4.99	6.03	6.68	8.42	11.63	12.92	2.73	4.92	5.97	6.61	8.33	11.59	12.87
	Sensible capacity	High	kW	2.83	4.16	6.04	6.58	9.22	12.21	13.49	2.80	4.08	5.94	6.46	9.06	12.14	13.41
		Medium	kW	2.59	3.94	5.39	5.86	7.75	10.43	11.40	2.57	3.89	5.31	5.77	7.66	10.38	11.34
		Low	kW	2.10	3.66	4.84	5.23	6.35	8.61	9.37	2.09	3.60	4.79	5.17	6.29	8.58	9.34
Heating capacity (standard conditions)		High	kW	4.05	6.42	7.88	8.93	12.72	17.29	19.05	3.91	5.72	7.99	7.94	14.43	19.30	19.20
		Medium	kW	3.69	6.03	7.11	8.04	10.84	15.05	16.40	3.68	5.51	7.47	7.44	12.63	17.17	17.03
		Low	kW	3.04	5.59	6.47	7.28	9.06	12.68	13.73	3.23	5.25	7.02	6.99	10.86	14.88	14.79
Power input	High		kW	0.265	0.460	0.505		0.750	1.300		0.265	0.460	0.505		0.750	1.300	
	Medium		kW	0.19	0.39	0.38		0.54	1.09		0.19	0.39	0.38		0.54	1.09	
	Low		kW	0.14	0.35	0.29		0.37	0.87		0.14	0.35	0.29		0.37	0.87	
Dimensions	Unit	HeightxWidthxLength	mm	559x754x280	559x964x280	559x1,170x280		718x1,170x353	718x1,380x353		559x754x280	559x964x280	559x1,170x280		718x1,170x353	718x1,380x353	
Weight	Unit		kg	32.5	40.6	47.3	48.7	65.3	77.0	79.5	34.7	43.2	50.3	51.7	70.9	83.4	85.9
Air filter	Type			Acrylic fiber - Filtering class G2 (G4 on request)													
Fan	Type			Centrifugal													
	Quantity			1	2						1	2					
	Air flow rate	High	m^3/h	802	1,241	1,609	1,584	2,380	3,206	3,175	794	1,212	1,573	1,550	2,328	3,186	3,155
		Medium	m^3/h	700	1,134	1,384	1,371	1,898	2,641	2,604	694	1,115	1,362	1,349	1,871	2,626	2,590
		Low	m^3/h	534	1,021	1,208	1,200	1,485	2,092	2,073	532	1,004	1,194	1,186	1,466	2,084	2,065
Total sound power level	High		dBA	66.0	69.0	72.0		74.0	78.0		66.0	69.0	72.0		74.0	78.0	
	Medium		dBA	61.0	63.0	67.0			73.0		61.0	64.0	67.0			73.0	
	Low		dBA	54.0	59.0	62.0		60.0	69.0		54.0	61.0	62.0		60.0	69.0	
Sound pressure level	High		dBA	61.0	64.0	67.0		69.0	73.0		61.0	64.0	67.0		69.0	73.0	
	Medium		dBA	56.0	58.0	62.0			68.0		56.0	59.0	62.0			68.0	
	Low		dBA	49.0	54.0	57.0		55.0	64.0		49.0	56.0	57.0		55.0	64.0	
Electric heater	Power input (Optional)		kW	2.0	6.0	9.0			12.0		2.0	6.0	9.0			12.0	
Piping connections	Drain	OD	mm	17													
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230													
Control systems	Wired remote control			FWEC3A/FWEDA/SHINKA/FWEC2T/4T													

For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

MSP Ducted unit with BLDC fan motor

- DIP Switch that allows the selection of the optimum fan speed according to the ESP without airflow dropping.
- Integrated DC drain pump as standard.
- Sub-drain pan provided as a standard.
- The side of the water connection can be changed on site.
- For air filters, G2 filters are standard, with G3 and G4 filters as options
- Factory Mounted valves and optional valves are supplied with special thermal insulations.

FWQ-A

FWEC10

FWEC3A

FWEDA

SHINKA TOUCH/ SHINKA ZONE

FWQ-A

Indoor unit			FWQ-AT/AF	04	05	07	09	11	14	17	20	25	04	05	07	09	11	14	17	20	25
				2-pipe									4-pipe								
Cooling capacity (standard conditions)	Total capacity	Low	kW	1.46	1.72	2.58	3.3	4.4	5.59	6.53	7.8	10.65	1.31	1.55	2.31	2.97	3.94	5.02	5.88	7.04	9.59
		Medium	kW	2.09	2.5	3.47	4.38	5.75	7.05	8.56	9.93	11.61	1.9	2.27	3.11	3.94	5.15	6.32	7.7	8.96	10.45
		High	kW	2.34	2.73	3.64	4.64	5.84	7.39	8.9	10.21	11.8	2.12	2.48	3.26	4.18	5.23	6.63	7.97	9.21	10.61
	Sensible capacity	Low	kW	1.07	1.26	1.93	2.5	3.36	4.26	5.05	5.32	7.3	0.98	1.18	1.76	2.29	3.06	3.89	4.62	4.89	6.7
		Medium	kW	1.57	1.89	2.64	3.38	4.49	5.52	6.76	7.01	8.32	1.44	1.74	2.39	3.08	4.07	5.01	6.17	6.41	7.59
		High	kW	1.77	2.08	2.8	3.63	4.61	5.85	7.08	7.29	8.54	1.62	1.92	2.53	3.3	4.18	5.31	6.44	6.66	7.78
	Latent capacity	Low	kW	0.39	0.46	0.65	0.8	1.04	1.33	1.48	2.48	3.35	0.33	0.37	0.55	0.68	0.88	1.13	1.26	2.15	2.89
		Medium	kW	0.52	0.61	0.83	1	1.26	1.53	1.8	2.92	3.29	0.46	0.53	0.72	0.86	1.08	1.31	1.53	2.55	2.86
		High	kW	0.57	0.65	0.84	1.01	1.23	1.54	1.82	2.92	3.26	0.5	0.56	0.73	0.88	1.05	1.32	1.53	2.55	2.83
Heating capacity (standard conditions)	Capacity	Low	kW	1.59	1.88	3.24	3.8	4.95	6.13	6.61	7.89	10.65	1.64	1.94	2.73	3.31	4.32	5.37	5.83	8.87	9.37
		Medium	kW	2.34	2.83	3.91	4.97	6.34	7.49	8.67	10.03	11.66	2.3	2.72	3.43	4.31	5.51	6.51	7.64	8.83	10.24
		High	kW	2.66	3.12	4.01	5.26	6.45	7.78	8.99	10.34	11.85	2.54	2.93	3.56	4.56	5.61	6.75	7.92	9.1	10.41
Power input		Low	kW	0.028	0.04		0.052	0.056		0.089	0.101	0.108	0.028	0.04		0.052	0.056		0.089	0.101	0.108
		Medium	kW	0.035	0.048		0.055	0.1	0.12	0.1	0.14	0.18	0.035	0.048		0.055	0.1	0.12	0.1	0.14	0.18
		High	kW	0.045	0.056	0.069	0.072	0.126	0.149	0.11	0.16	0.2	0.045	0.056	0.069	0.072	0.126	0.149	0.11	0.16	0.2
Dimensions	Unit	Height	mm	249									249								
		Width	mm	690		840	1,200			1,620			690		840	1,200			1,620		
		Depth	mm	793									793								
Weight	Unit		kg	26		30	40			52			27		32	43			55		
Fan	Type			Sirocco fan									Sirocco fan								
	Air flow rate	Low	m^3/h	246	296	480	598	822	1,091	1,096	1,350	1,981	223	269	436	544	747	992	996	1,228	1,801
		Medium	m^3/h	374	462	668	825	1,145	1,498	1,516	1,829	2,253	340	420	607	750	1,041	1,362	1,379	1,663	2,048
		High	m^3/h	429	517	711	887	1,176	1,612	1,587	1,903	2,310	390	470	646	806	1,069	1,465	1,443	1,730	2,100
	Available static pressure	Low	Pa	20			26						20			26					
		Medium	Pa	50									50								
		High	Pa	60									60								
Total sound power level		Low	dBA	44	46	50		51	57	53	54	56	43	45	49		50	56	52	53	55
		Medium	dBA	49	52	55		57	62	59		61	48	51	54		56	61	58		60
		High	dBA	52	55	59	57	58	63	61		62	51	54	58	56	57	62	60		61
Inlet section + radiated sound power		Low	dBA	42	44	48		49	55	51	52	54	41	43	47		48	54	50	51	53
		Medium	dBA	47	50	53		55	60	57		59	46	49	52		54	59	56		58
		High	dBA	50	53	57	55	56	61	59		60	49	52	56	54	55	60	58		59
Outlet section sound power		Low	dBA	39	41	45		46	52	48	49	51	38	40	44		45	51	47	48	50
		Medium	dBA	44	47	50		52	57	54		56	43	46	49		51	56	53		55
		High	dBA	47	50	54	52	53	58	56		57	46	49	53	51	52	57	55		56
Sound pressure level		Low	dBA	28	30	34		35	41	37	38	40	27	29	33		34	40	36	37	39
		Medium	dBA	33	36	39		41	46	43		45	32	35	38		40	45	42		44
		High	dBA	36	39	43	41	42	47	45		46	35	38	42	40	41	46	44		45
Water flow	Cooling	Low	l/h	250	295	444	568	757	961	1,123	1,341	1,831	225	266	398	511	678	862	1,011	1,212	1,649
		Medium	l/h	360	430	596	754	988	1,212	1,471	1,707	1,997	326	390	534	678	885	1,087	1,324	1,541	1,797
		High	l/h	402	469	626	799	1,005	1,271	1,523	1,756	2,029	365	426	561	719	900	1,140	1,370	1,585	1,825
	Heating	Low	l/h	273	323	557	654	851	1,054	1,136	1,356	1,831	141	167	234	285	371	461	501	598	805
		Medium	l/h	403	486	672	854	1,090	1,288	1,491	1,726	2,004	198	234	295	371	474	560	657	760	881
		High	l/h	457	537	690	904	1,109	1,337	1,546	1,777	2,038	219	252	306	392	482	581	681	782	895
Water pressure drop	Cooling	Low	kPa	7.5	10.0	8.7	5.2	8.8	13.6	20.3	28.0	50.1	6.4	8.7	7.4	4.4	7.4	11.4	16.9	24.0	41.5
		Medium	kPa	13.3	18.4	14.7	8.3	13.8	20.1	33.1	43.6	58.6	11.3	15.7	12.3	6.9	11.4	16.7	27.4	36.2	48.4
		High	kPa	16.0	21.3	16.1	9.1	14.1	21.9	35.3	45.9	60.3	13.6	18.2	13.4	7.6	11.7	18.1	29.2	38.1	49.7
	Heating	Low	kPa	8.5	12.0	13.0	6.5	10.7	15.9	20.7	29.0	50.0	3.2	3.6	7.8	8.7	9.9	12.1		17.0	29.7
		Medium	kPa	16.1	22.8	18.3	10.2	16.3	22.4	33.7	44.5	59.0	5.4	6.7	11.1	11.7	14.5	17.4	20.0	27.2	35.5
		High	kPa	19.9	27.0	19.2	11.3	16.8	23.9	36.0	46.9	60.8	6.4	7.7	11.8	12.6	14.9	18.7	21.5	28.8	36.7
Allowed water temperature			°C	5/90									5/90								
Piping connections	Water	Inlet		3/4" BSP (female thread)									3/4" BSP (female thread)								
		Outlet		3/4" BSP (female thread)									3/4" BSP (female thread)								
Power supply	Voltage/Phase/Frequency		V/n/Hz	220-240 / 1 / 50									220-240 / 1 / 50								

Wall mounted unit

- BLDC fan motor unit for wall mounting
- Modern white panel design
- 5 different sizes from 2.4 kW to 5.3 kW
- **FWT-HTVD** model with 230V ON-OFF built-in 3-way valve factory mounted
- 2-way valve available as supplied loose accessory (for FWT-HT model)
- Double filtration stage (Gin-Ion filter + PM2.5 filter)
- Daikin Flash Streamer technology integrated
- FCBAG Modbus gateway available as accessory for BMS integration
- Dry contact for remote ON/OFF

Flash Streamer

FWT-HT

BRC51D67

ARC485B2

Indoor unit				FWT-HT	02	03	04	05	06
							2-pipe		
Cooling capacity (standard conditions)	Latent capacity	High		kW	0.66 (1)	0.63 (1)	0.88 (1)	0.98 (1)	1.09 (1)
	Total capacity	High		kW	2.43 (1)	2.70 (1)	3.49 (1)	4.54 (1)	5.28 (1)
		Medium		kW	2.32 (1)	2.55 (1)	3.19 (1)	4.07 (1)	4.54 (1)
		Low		kW	2.11 (1)	2.23 (1)	2.58 (1)	3.37 (1)	4.07 (1)
	Sensible capacity	High		kW	1.77 (1)	2.07 (1)	2.61 (1)	3.56 (1)	4.19 (1)
		Medium		kW	1.70 (1)	1.85 (1)	2.37 (1)	3.17 (1)	3.58 (1)
		Low		kW	1.52 (1)	1.61 (1)	1.88 (1)	2.64 (1)	3.19 (1)
Heating capacity (standard conditions)		High		kW	2.73 (2)	2.96 (2)	3.72 (2)	4.89 (2)	6.24 (2)
		Medium		kW	2.37 (2)	2.40 (2)	3.19 (2)	4.54 (2)	4.89 (2)
		Low		kW	1.96 (2)	2.02 (2)	2.64 (2)	4.04 (2)	4.54 (2)
Power input	High			kW	0.010	0.012	0.020	0.025	0.043
	Medium			kW	0.008	0.009	0.016	0.020	0.027
	Low			kW	0.007	0.007	0.010	0.015	0.020
FCEER					A (1)	A (1)	A (1)	A (1)	B (1)
FCCOP					A (2)	A (2)	B (2)	B (2)	B (2)
Dimensions	Unit	HeightxWidthxLength		mm	288x870x234			317x1,089x275	
	Packed unit	HeightxWidthxLength		mm	314x930x357			366x1,173x395	
Weight	Unit			kg	10.0			14.6	
	Packed unit			kg	11.8			17.1	
Casing	Colour				White				
	Material				High impact polystyrene				
Air direction control					Automatic louver (up & down)				
Air filter	Type				Gin-Ion filter + PM2.5 filter				
	Quantity				2				
Air flow rate	High			m^3/h	442 (3)	476 (3)	629 (3)	866 (3)	1,053 (3)
	Medium			m^3/h	391 (3)	416 (3)	544 (3)	765 (3)	883 (3)
	Low			m^3/h	340 (3)	357 (3)	425 (3)	663 (3)	782 (3)
Total sound power level	High			dBA	46 (4)	49 (4)	55 (4)		59 (4)
	Medium			dBA	43 (4)	44 (4)	52 (4)	51 (4)	54 (4)
	Low			dBA	39 (4)	39 (4)	45 (4)	48 (4)	51 (4)
Sound pressure level	High			dBA	34 (5)	35 (5)	42 (5)		46 (5)
	Medium			dBA	29 (5)	30 (5)	39 (5)	38 (5)	42 (5)
	Low			dBA	25 (5)	26 (5)	32 (5)	34 (5)	39 (5)
Piping connections	Water	Inlet			3/4''				
		Outlet			3/4''				
	Drain	OD		mm	16.5				
Power supply	Phase/Frequency/Voltage			Hz/V	1~/ 50 / 220-240				
Fan motor	Power input		High		0.007	0.007	0.010	0.015	0.020
			Medium		0.008	0.009	0.016	0.020	0.027
			Low		0.010	0.012	0.020	0.025	0.043
	Running current		High		0.07	0.07	0.09	0.11	0.16
			Medium		0.08	0.08	0.12	0.16	0.22
			Low		0.10	0.10	0.16	0.22	0.32
Control systems	Infrared remote control				ARC485B2				
	Wired remote control				BRC51D67				

(1) Cooling: indoor temp. 27°CDB, 19°CWB; entering water temp. 7°C, water temperature rise 5K. | (2) Heating: 2 pipe: air 20°CDB; entering water 45°C, water temperature drop 5K. | (3) Air flow at 0Pa ESP | (4) Sound power level according to ISO3741 | (5) Sound pressure measured at 1m in front of the unit and 0.8m below the vertical centre line of the unit (JIS C 9612).
For standard conditions refer to the Measuring Conditions table, at the end of this catalogue

Control Systems Solutions

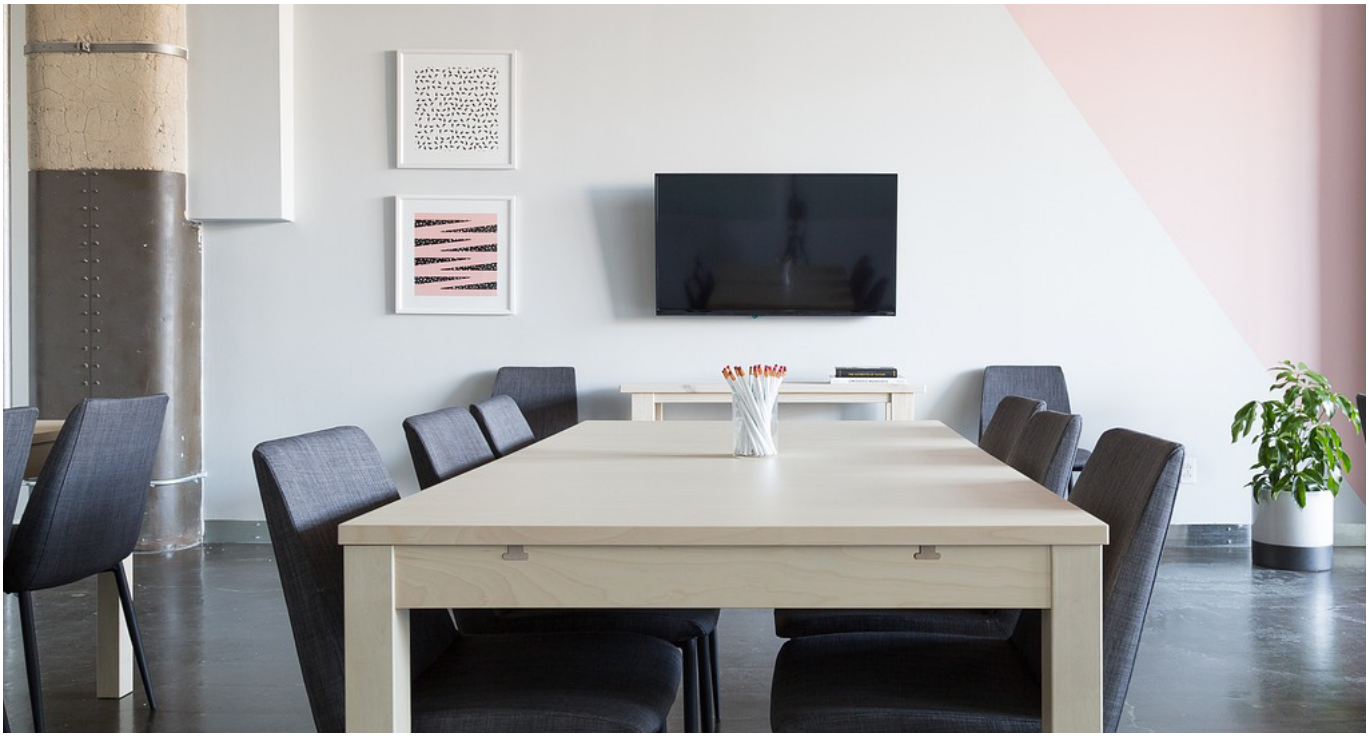

Smart Control System (SCS)

Control solution

Scan to view the product page

System in numbers

3 main configurations

- Light
- Medium
- Full

8 advantages of SCS

20 product ranges covered

System overview

Smart Control System is an advanced solution for **managing hydronic HVAC systems, simplifying design, installation**, and **operation**. It enables the seamless integration of a complete Daikin solution, including chillers, heat pumps, air handling units (AHUs), and fan coils. The system is configured via an external panel that connects to the units using the Modbus protocol, ensuring **optimized communication and performance throughout the entire system**.

Available in **three configurations** - Light, Medium, and Full - it offers scalability in hardware, licensing, and pricing. Each version can manage **up to four chillers or heat pumps**, with a total cooling capacity of **up to 500 kW**, in addition to **supporting equipment such as fan coils and air handling units**.

- The **Light** configuration supports up to 500 data points
- The **Medium** configuration supports up to 1,250 data points
- The **Full** configuration supports up to 2,500 data points

All configurations allow for the management of multiple fan coil zones or AHUs, offering flexibility for various applications.

The Smart Control System supports a wide range of Daikin products, ensuring adaptability for different installations and use cases. These include **EWAT-CZ air-cooled chillers, EWYT-CZ air-to-water heat pumps**, and a variety of air handling units and **fan coils designed for decentralized ventilation systems**, available in multiple sizes and airflow capacities.

8 advantages of Smart Control System

Turnkey solution
It facilitates the work of plant designers and consultants

Plant operation optimization
SCS determines the best working configuration for the units, prioritizing comfort, system efficiency and running costs

Reliability & maintenance costs reduction
SCS optimises equipment performance by extending the life of the HVAC system and also reduces maintenance costs, including labour and spare parts

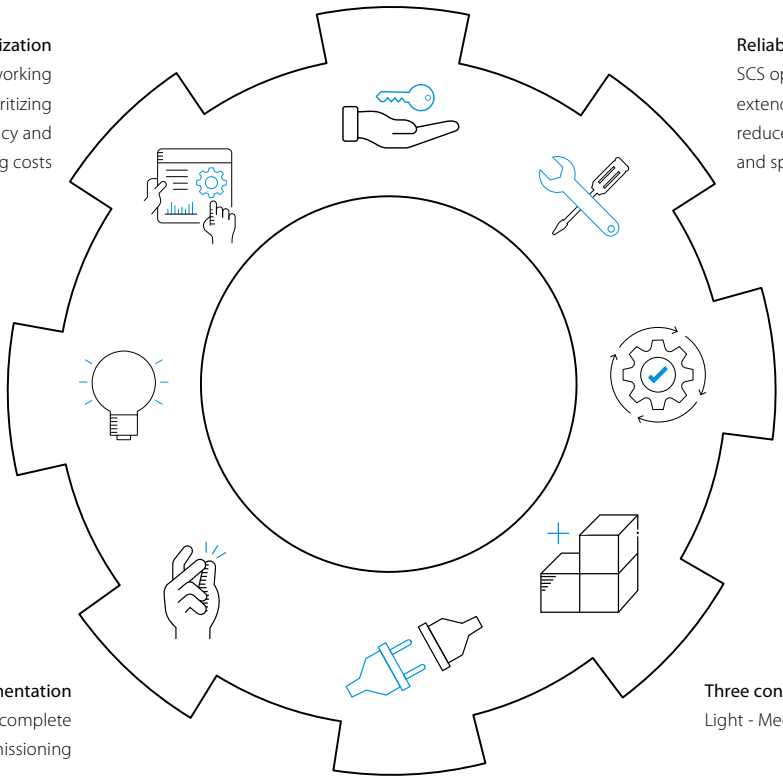

Highly competitive architecture
SCS is highly competitive with third-party control systems

Optimum performance setup
It uses data from unit's sensors and controllers to improve performance

Fast & easy implementation
The Daikin technician can easily complete the setup during commissioning

Three configurations available:
Light - Medium - Full

Plug and play solution
It requires only the external panel and a few additional sensors for installation

Eligible to provide credits for BREEAM and LEED building protocols

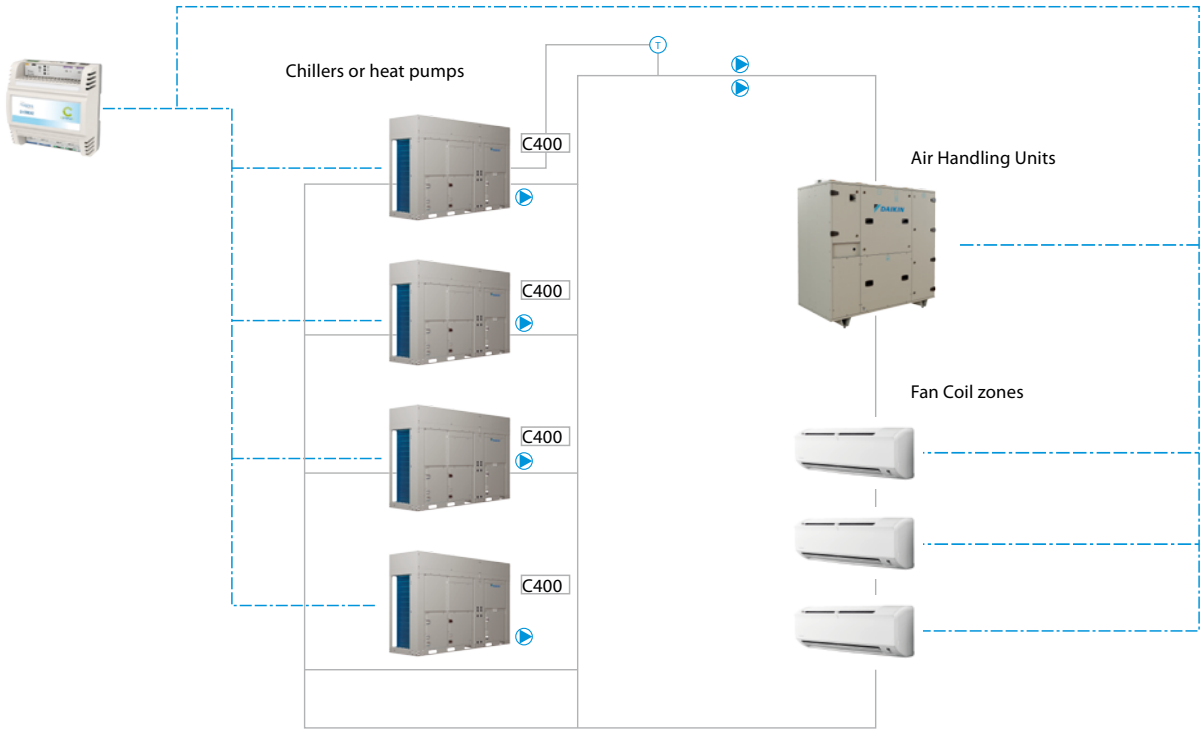

Product coverage

Fan Coil Units

Cassette
Cooling capacity: **1.3 - 10.5 kW**

Ducted
Cooling capacity: **0.9 kW - 17.6 kW**



Floor Standing
Cooling capacity: **1 - 8.18 kW**

Flexi
Cooling capacity: **1 - 8.18 kW**

Wall Mounted
Cooling capacity: **1.9 - 5.2 kW**

Air Cooled Chillers

EWAT-CZ
Cooling capacity range:
16-90 kW

Air-to-Water Heat Pump

EWYT-CZ
Cooling capacity range
16-90 kW

Heating capacity range
16-90 kW

Air Handling Units

Compact L
Air flow range
from 200 m3/h up to 4000 m3/h



Compact T
Nominal Airflow
from 200 up to 4200 m3/h

Shinka

FCU wired remote controller

The perfect balance of comfort, control and efficiency

Whether you're looking to maintain perfect comfort in your home, office, or commercial building, Shinka controller ensures optimal performance for every fan coil units system.

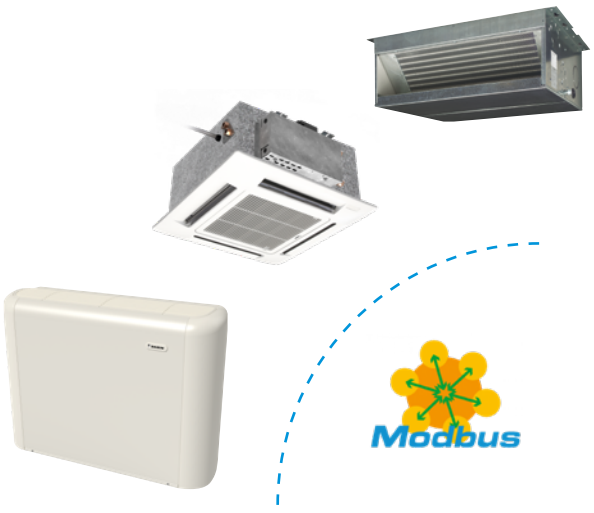

Shinka Touch
(SHINKATOUCHWA/BA)

Shinka Zone
(SHINKAZONEWA/BA)

FCU Control PCB
(FWEDA)

- **Shinka Touch:** single-zone control
- **Shinka Zone:** multi-zone control

Benefits

Single-zone controller

This model represents an advanced, efficient, and complete single-zone control system, perfect for maintaining optimal comfort in individual spaces.

- Color Full-Touch display 4.3”
- Embedded Bluetooth connectivity
- FCU complete control with programmable settings (economy/antifreeze functions, weekly custom schedules, notifications for anomalies or maintenance)
- Multi-sensor integration (light, proximity) available with Shinka Sense model
- Can be integrated within a multi-zone or BMS system through Modbus protocol.

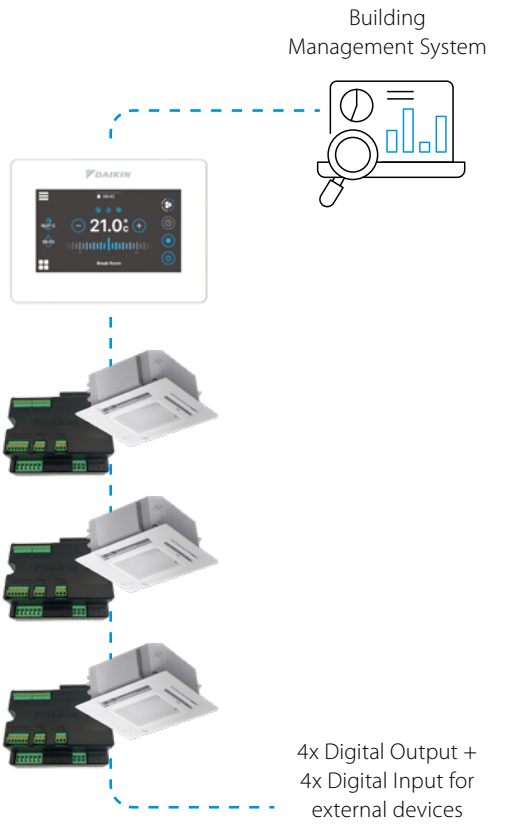

Multi-zone controller

This model represents a versatile, scalable, and highly customizable system, ideal for optimizing comfort and energy efficiency in complex spaces or large buildings.

- Independent temperature control in different areas (zones) of a building
- Ability to set customized temperatures and schedules for each zone
- Access to real-time data for each zone

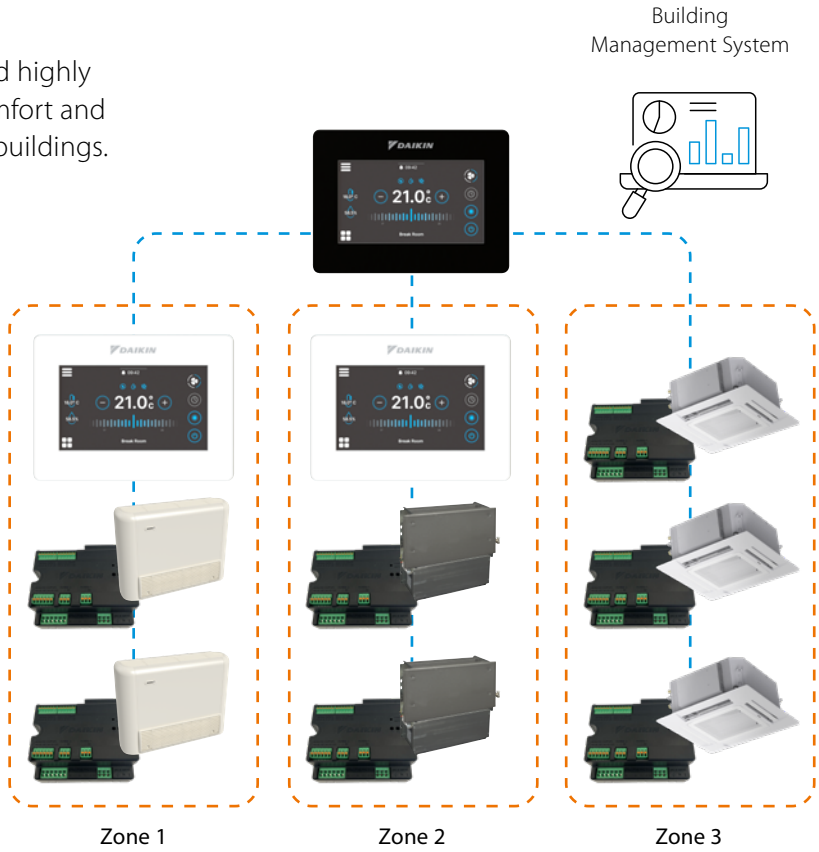

Daikin Shinka Manager

Commissioning Mobile App

Available for iOS and Android

Indoor units		FWC-BT/BF	FWF-BT/BF	FWF-DT/DF	FWC-DT/DF	FWH-AT/AF	FWI-AT/AF	FWZ-AT/AF	FWV-DAT/DAF	FWR-AT/AF
Panels	Decoration panel 600x600		BYFQ60B	BYFQ60B	BYCQ140C	FPAN02B (2 up to 4 class)	FPAN02B (2 up to 4 class)			
	Decoration panel 900x900	BYCQ140C				FPAN06B (6 up to 8 class)	FPAN06B (6 up to 8 class)			
	Coanda effect decoration panel 600x600					FCND02A (2 up to 4 class)	FCND02A (2 up to 4 class)			
	Design panel			BYFQ60CW (white) BYFQ60CS (silver)	BYCQ140E (standard) BYCQ140EB (black) BYCQ140EW (white)					
	Adaptor for design panel			EKRP1CAS5A	EKRP1CAS5A					
	Panel spacer for reducing required installation height	KDBQ44B60	KDBQ44B60	KDBQ44B60						
	Sealing member of air discharge outlet	KDBHQ55C140	KDBH44BA60	KDBH44BA60	KDBHQ55C140					
	Spigot for fresh air					SPFAI1A (2 up to 4 class) SPFAI2A (6 up to 8 class)	SPFAI1A (2 up to 4 class) SPFAI2A (6 up to 8 class)			
	Air distribution plenum					PPAI02A (2 up to 4 class) PPAI06A (6 up to 8 class)	PPAI02A (2 up to 4 class) PPAI06A (6 up to 8 class)			
	Rear panel							ERPV02A6 (2 class) ERPV03A6 (3 class) ERPV06A6 (6 class) ERPV10A6 (8 class)	ERPV02A6 (1, 15 & 2 class) ERPV03A6 (25 & 3 class) ERPV06A6 (35, 4 & 6 class) ERPV10A6 (8 & 10 class)	ERPV02A6 (2 class) ERPV03A6 (3 class) ERPV06A6 (6 class) ERPV10A6 (8 class)
	Air intake & discharge grille							EAIDF02A6 (2 class) EAIDF03A6 (3 class) EAIDF06A6 (6 class) EAIDF10A6 (10 class)	EAIDF02A6 (1, 15 & 2 class) EAIDF03A6 (25 & 3 class) EAIDF06A6 (35, 4 & 6 class) EAIDF10A6 (8 & 10 class)	EAIDF02A6 (2 class) EAIDF03A6 (3 class) EAIDF06A6 (6 class) EAIDF10A6 (10 class)
Individual control systems & network	Wired remote controller (standard)	BRC1HF7	BRC1HF7			FWEC1A			FWEC1A	
	Wired remote controller (advanced)					FWEC2A			FWEC2A	
	Wired remote controller (advanced Plus)			FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A
	Simplified electronic controller (2 pipe)			FWEC10	FWEC10	FWEC2T	FWEC10	FWEC10	FWEC2T	FWEC10
	Simplified electronic controller (4 pipe)			FWEC10	FWEC10	FWEC4T	FWEC10	FWEC10	FWEC4T	FWEC10
	Wireless controller	BRC7F532F	BRC7E530							
	Controller electromechanical								ECFWMB6	
	Split controller - power control board			FWEDA	FWEDA	FWEDA	FWEDA	FWEDA	FWEDA	FWEDA
	Split controller - touch screen control panel			SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA
	On-board mounting kit for wired remote controller							FWECKA	FWECKA	FWECKA
	On-board mounting kit for simplified controller							FWCKRX (right side) FWCKLX (left side)	FWCKRX (right side) FWCKLX (left side)	FWCKRX (right side) FWCKLX (left side)
	Wall-mounting kit for wired remote controller			FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA
Centralised control systems	Central remote control	DCS302CA51	DCS302CA51							
	Unified ON/OFF control	DCS301BA51	DCS301BA51							
	Schedule timer	DST301BA51	DST301BA51							
Building Management System & Standard protocol interface	Intelligent Touch Manager	DCM601A5A	DCM601A5A							
	Intelligent Touch Controller	DCS601C51C	DCS601C51C							

	FWL-DAT/DAF	FWS-AT/AF	FWM-DAT/DAF	FWE-DT/DF	FWE-FT/FF	FWP-CT/CF	FWB-CT/CF	FWQ-AT/AF	FWD-AT/AF	FWN-AT/AF	FWT-HT
	ERPV02A6 (1, 15 & 2 class) ERPV03A6 (25 & 3 class) ERPV06A6 (35, 4 & 6 class) ERPV10A6 (8 & 10 class)										
	EAIDF02A6 (1, 15 & 2 class) EAIDF03A6 (25 & 3 class) EAIDF06A6 (35, 4 & 6 class) EAIDF10A6 (8 & 10 class)	EAIDF02A6 (2 class) EAIDF03A6 (3 class) EAIDF06A6 (6 class) EAIDF10A6 (10 class)	EAIDF02A6 (1, 15 & 2 class) EAIDF03A6 (25 & 3 class) EAIDF06A6 (35, 4 & 6 class) EAIDF10A6 (8 & 10 class)								
	FWEC1A		FWEC1A	FWEC1A	FWEC1A		FWEC1A		FWEC1A		BRC51D67
	FWEC2A		FWEC2A	FWEC2A	FWEC2A		FWEC2A		FWEC2A		
	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	FWEC3A	
	FWEC2T	FWEC10	FWEC2T	FWEC2T	FWEC2T	FWEC10	FWEC2T	FWEC10	FWEC2T	FWEC10	
	FWEC4T	FWEC10	FWEC4T	FWEC4T	FWEC4T	FWEC10	FWEC4T	FWEC10	FWEC4T	FWEC10	
											ARC485B2
	ECFWMB6		ECFWMB6								
	FWEDA	FWEDA	FWEDA	FWEDA	FWEDA	FWEDA	FWEDA	FWEDA	FWEDA	FWEDA	
	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	SHINKATOUCHBA SHINKATOUCHWA SHINKAZONEBA SHINKAZONEWA	
	FWECKA										
	FWCKRX (right side) FWCKLX (left side)										
	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	FWFCKA	

Indoor units		FWC-BT/BF	FWF-BT/BF	FWF-DT/DF	FWC-DT/DF	FWH-AT/AF	FWI-AT/AF	FWZ-AT/AF	FWV-DAT/DAF	FWR-AT/AF
ON/OFF valves 230V	3-ways 230V ON/OFF valve kit (2-pipe)	EKMV3C09B	EKMV3C09B	EKWV3V3W5A	EK10WV3V3C5A	E2C3V02A (2 up to 4 class) E2C3V06A (6 up to 8 class)	E2C3V02A (2 up to 4 class) E2C3V06A (6 up to 8 class)	E2MV03A6 (2, 3 & 6 class) E2MV10A6 (8 class)	E2MV03A6 (1 up to 35 class) E2MV06A6 (4 & 6 class) E2MV10A6 (8 & 10 class)	E2MV03A6 (2, 3 & 6 class) E2MV10A6 (8 class)
	3-ways 230V ON/OFF valve kit (4-pipe)	EKMV3C09B x2	EKMV3C09B x2	EKWV3V3W5A x2	EK10WV3V3C5A + EK08WV3V3W5A	E4C3V02A (2 up to 4 class) E4C3V06A (6 up to 8 class)	E4C3V02A (2 up to 4 class) E4C3V06A (6 up to 8 class)	E4MV03A6 (2, 3 & 6 class) E4MV10A6 (8 class)	E4MV03A6 (1 up to 35 class) E4MV06A6 (4 & 6 class) E4MV10A6 (8 & 10 class)	E4MV03A6 (2, 3 & 6 class) E4MV10A6 (8 class)
	2-ways 230V ON/OFF valve kit (2-pipe)	EKMV2C09B	EKMV2C09B	EKWV2V3W5A	EK10WV2V3C5A	E2C2V02A (2 up to 4 class) E2C2V06A (6 up to 8 class)	E2C2V02A (2 up to 4 class) E2C2V06A (6 up to 8 class)			
	2-ways 230V ON/OFF valve kit (4-pipe)	EKMV2C09B x 2	EKMV2C09B x 2	EKWV2V3W5A x 2	EK10WV2V3C5A + EK08WV2V3W5A	E4C2V02A (2 up to 4 class) E4C2V06A (6 up to 8 class)	E4C2V02A (2 up to 4 class) E4C2V06A (6 up to 8 class)			
	2-ways 230V ON/OFF valve kit (cooling heat exchanger)							E2MV2B07A6 (2, 3 & 6 class) E2MV2B10A6 (8 class)	E2MV2B07A6 (1 up to 6 class) E2MV2B10A6 (8 & 10 class)	E2MV2B07A6 (2 up to 6 class) E2MV2B10A6 (8 class)
	2-ways 230V ON/OFF valve kit (additional heat exchanger)							E2MV2B07A6	E2MV2B07A6	E2MV2B07A6
	3-ways 230V ON/OFF valve kit (additional heat exchanger)									
	Simplified 3-ways 230V ON/OFF valve kit (2-pipe)							E2MVD03A6 (2 & 3 class) E2MVD06A6 (6 class) E2MVD10A6 (8 class)	E2MVD03A6 (1 up to 35 class) E2MVD06A6 (4 & 6 class) E2MVD10A6 (8 & 10 class)	E2MVD03A6 (2 & 3 class) E2MVD06A6 (6 class) E2MVD10A6 (8 class)
	Simplified 3-ways 230V ON/OFF valve kit (4-pipe)							E4MVD03A6 (2 & 3 class) E4MVD06A6 (6 class) E4MVD10A6 (8 class)	E4MVD03A6 (1 up to 35 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)	E4MVD03A6 (2 & 3 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)
ON/OFF valves 24V	3-ways 24V ON/OFF valve kit (cooling heat exchanger)					E2C324V02A (2 up to 4 class) E2C324V06A (6 up to 8 class)	E2C324V02A (2 up to 4 class) E2C324V06A (6 up to 8 class)	E2M2V03A6 (2 & 3 class) E2M2V06A6 (6 class) E2M2V10A6 (8 class)	E2M2V03A6 (1 up to 35 class) E2M2V06A6 (4 & 6 class) E2M2V10A6 (8 & 10 class)	E2M2V03A6 (2 & 3 class) E2M2V06A6 (6 class) E2M2V10A6 (8 class)
	3-ways 24V ON/OFF valve kit (4-pipe)					E4C324V02A (2 up to 4 class) E4C324V06A (6 up to 8 class)	E4C324V02A (2 up to 4 class) E4C324V06A (6 up to 8 class)	E4M2V03A6 (2 & 3 class) E4M2V06A6 (6 class) E4M2V10A6 (8 class)	E4M2V03A6 (1 up to 35 class) E4M2V06A6 (4 & 6 class) E4M2V10A6 (8 & 10 class)	E4M2V03A6 (2 & 3 class) E4M2V06A6 (6 class) E4M2V10A6 (8 class)
	2-ways 24V ON/OFF valve kit (cooling heat exchanger)					E2C224V02A (2 up to 4 class) E2C224V06A (6 up to 8 class)	E2C224V02A (2 up to 4 class) E2C224V06A (6 up to 8 class)	E2M2V207A6 (2, 3 & 6 class) E2M2V210A6 (8 class)	E2M2V207A6 (1 up to 6 class) E2M2V210A6 (8 & 10 class)	E2M2V207A6 (2, 3 & 6 class) E2M2V210A6 (8 class)
	2-ways 24V ON/OFF valve kit (additional heat exchanger)					E4C224V02A (2 up to 4 class) E4C224V06A (6 up to 8 class)	E4C224V02A (2 up to 4 class) E4C224V06A (6 up to 8 class)	E2M2V207A6	E2M2V207A6	E2M2V207A6
	2-ways 24V ON/OFF valve kit (4-pipe)									

	FWL-DAT/DAF	FWS-AT/AF	FWM-DAT/DAF	FWE-DT/DF	FWE-FT/FF	FWP-CT/CF	FWB-CT/CF	FWQ-AT/AF	FWD-AT/AF	FWN-AT/AF	FWT-HT
	E2MV03A6 (1 up to 35 class) E2MV06A6 (4 & 6 class) E2MV10A6 (8 & 10 class)	E2MV03A6 (2, 3 & 6 class) E2MV10A6 (8 class)	E2MV03A6 (1 up to 35 class) E2MV06A6 (4 & 6 class) E2MV10A6 (8 & 10 class)	E3V2VN02V3WA	EK02WV3V3W5A (4 up to 10 class) EK04WV3V3C5A (14 & 16 class) EK06WV3V3C5A (20 & 24 class)	E4V2N05OV3WA (4 & 5 class) E4V2N08OV3WA (6 & 8 class) E2MV10B6 (10 up to 17 class)	E4V2N05OV3WA (4 & 5 class) E4V2N08OV3WA (6 & 8 class) E2MV10B6 (10 up to 17 class)	EK02WV3V3W5A (4 up to 07 class) EK08WV3V3D5A (09 to 14 class) EK06WV3V3C5A (17 to 25 class)	ED2MV04A6 (4 class) ED2MV10A6 (6, 8 & 10 class) ED2MV18A6 (12 up to 18 class)	ED2MV04A6 (4 & 5 class) ED2MV10A6 (6 up 10 class) ED2MV18A6 (12 up to 18 class)	
	E4MV03A6 (1 up to 35 class) E4MV06A6 (4 & 6 class) E4MV10A6 (8 & 10 class)	E4MV03A6 (2, 3 & 6 class) E4MV10A6 (8 class)	E4MV03A6 (1 up to 35 class) E4MV06A6 (4 & 6 class) E4MV10A6 (8 & 10 class)	E3V4VN02V3WA	EK02WV3V3W5A x 2 (4 up to 10 class) EK04WV3V3C5A x 2 (14 & 16 class) EK06WV3V3C5A x 2(20 & 24 class)	E4V2N05OV3WA + E4VHN08OV3WA (4 up to 5 class) E4V2N08OV3WA + E4VHN08OV3WA (6 up to 8 class) E2MV10B6 + E4VHN17OV3WA (10 up to 17 class)	E4V2N05OV3WA + E4VHN08OV3WA (4 up to 5 class) E4V2N08OV3WA + E4VHN08OV3WA (6 up to 8 class) E2MV10B6 + E4VHN17OV3WA (10 up to 17 class)	EK02WV3V3W5A x2 (4 up to 07 class) EK08WV3V3D5A x2 (09 to 14 class) EK06WV3V3C5A x2 (17 to 25 class)	ED4MV04A6 (4 class) ED4MV10A6 (6, 8 & 10 class) ED4MV18A6 x 2 (12 up to 18 class)	ED4MV04A6 (4 & 5 class) ED4MV10A6 (6 up 10 class) ED2MV18A6 x2 (12 up to 18 class)	
				E2V2VN01V3WA	EK02WV2V3W5A (4 up to 10 class) EK04WV2V3C5A (14 & 16 class) EK06WV2V3C5A (20 & 24 class)			EK02WV2V3W5A (4 up to 07 class) EK08WV2V3D5A (09 to 14 class) EK06WV2V3C5A (17 to 25 class)	ED2MV2B04A6 (4 class) ED2MV2B10A6 (6 up 10 class) ED2MV2B18A6 (12 up to 18 class)	ED2MV2B04A6 (4 & 5 class) ED2MV2B10A6 (6 up 10 class) ED2MV2B18A6 (12 up to 18 class)	EK02HV2A (2 to 4 class) EK05HV2A (5 & 6 class)
				E2V4VN01V3WA	EK02WV2V3W5A (4 up to 10 class) EK04WV2V3C5A (14 & 16 class) EK06WV2V3C5A (20 & 24 class)	E2MV2B07A6 + E2MV2B07A6 (4 up to 8 class) E2MV2B10A6 + E2MV2B07A6 (10 up to 17 class)	E2MV2B07A6 + E2MV2B07A6 (4 up to 8 class) E2MV2B10A6 + E2MV2B07A6 (10 up to 17 class)	EK02WV2V3W5A x2 (4 up to 07 class) EK08WV2V3D5A x2 (09 to 14 class) EK06WV2V3C5A x2 (17 to 25 class)	ED4MV2B04A6 (4 class) ED4MV2B10A6 (6 up 10 class) ED2MV2B18A6 x2 (12 up to 18 class)	ED4MV2B04A6 (4 & 5 class) ED4MV2B10A6 (6 up 10 class) ED2MV2B18A6 x2 (12 up to 18 class)	
	E2MV2B07A6 (1 up to 6 class) E2MV2B10A6 (8 & 10 class)	E2MV2B07A6 (2 up to 6 class) E2MV2B10A6 (8 class)	E2MV2B07A6 (1 up to 6 class) E2MV2B10A6 (8 & 10 class)			E2MV2B07A6 (4 up to 8 class) E2MV2B10A6 (10 up to 17 class)	E2MV2B07A6 (4 up to 8 class) E2MV2B10A6 (10 up to 17 class)				
	E2MV2B07A6	E2MV2B07A6	E2MV2B07A6			E2MV2B07A6	E2MV2B07A6				
						E4VHN08OV3WA (4 up to 8 class) E4VHN17OV3WA (10 up to 17 class)	E4VHN08OV3WA (4 up to 8 class) E4VHN17OV3WA (10 up to 17 class)				
	E2MVD03A6 (1 up to 35 class) E2MVD06A6 (4 & 6 class) E2MVD10A6 (8 & 10 class)	E2MVD03A6 (2 & 3 class) E2MVD06A6 (6 class) E2MVD10A6 (8 class)	E2MVD03A6 (1 up to 35 class) E2MVD06A6 (4 & 6 class) E2MVD10A6 (8 & 10 class)								
	E4MVD03A6 (1 up to 35 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)	E4MVD03A6 (2 & 3 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)	E4MVD03A6 (1 up to 35 class) E4MVD06A6 (4 & 6 class) E4MVD10A6 (8 & 10 class)								
	E2M2V03A6 (1 up to 35 class) E2M2V06A6 (4 & 6 class) E2M2V10A6 (8 & 10 class)	E2M2V03A6 (2 & 3 class) E2M2V06A6 (6 class) E2M2V10A6 (8 class)	E2M2V03A6 (1 up to 35 class) E2M2V06A6 (4 & 6 class) E2M2V10A6 (8 & 10 class)			E4V2N05O24WA (4 & 5 class) E4V2N08O24WA (6 & 8 class) E4V2N17O24WA (10 up to 17 class)	E4V2N05O24WA (4 & 5 class) E4V2N08O24WA (6 & 8 class) E4V2N17O24WA (10 up to 17 class)				
	E4M2V03A6 (1 up to 35 class) E4M2V06A6 (4 & 6 class) E4M2V10A6 (8 & 10 class)	E4M2V03A6 (2 & 3 class) E4M2V06A6 (6 class) E4M2V10A6 (8 class)	E4M2V03A6 (1 up to 35 class) E4M2V06A6 (4 & 6 class) E4M2V10A6 (8 & 10 class)								
	E2M2V207A6 (1 up to 35 class) E2M2V210A6 (8 & 10 class)	E2M2V207A6 (2, 3 & 6 class) E2M2V210A6 (8 class)	E2M2V207A6 (1 up to 35 class) E2M2V210A6 (8 & 10 class)			E2M2V207A6 (4 up to 8 class) E2M2V210A6 (10 up to 17 class)	E2M2V207A6 (4 up to 8 class) E2M2V210A6 (10 up to 17 class)				
	E2M2V207A6	E2M2V207A6	E2M2V207A6			E2M2V207A6	E2M2V207A6				
						E2M2V207A6 + E2M2V207A6 (4 up to 8 class) E2M2V210A6 + E2M2V207A6 (10 up to 17 class)	E2M2V207A6 + E2M2V207A6 (4 up to 8 class) E2M2V210A6 + E2M2V207A6 (10 up to 17 class)				

	Indoor units	FWC-BT/BF	FWF-BT/BF	FWF-DT/DF	FWC-DT/DF	FWH-AT/AF	FWI-AT/AF	FWZ-AT/AF	FWV-DAT/DAF	FWR-AT/AF
Proportional valves	3-ways proportional valve kit (2-pipe)					E2C3PV02A (2 up to 4 class) E2C3PV06A (6 up to 8 class)	E2C3PV02A (2 up to 4 class) E2C3PV06A (6 up to 8 class)	E2MPV03A6 (2 & 3 class) E2MPV06A6 (6 class) E2MPV10A6 (8 class)	E2MPV03A6 (1 up to 35 class) E2MPV06A6 (4 & 6 class) E2MPV10A6 (8 & 10 class)	E2MPV03A6 (2 & 3 class) E2MPV06A6 (6 class) E2MPV10A6 (8 class)
	3-ways proportional valve kit (additional heat exchanger)					E4C3PV02A (2 up to 4 class) E4C3PV06A (6 up to 8 class)	E4C3PV02A (2 up to 4 class) E4C3PV06A (6 up to 8 class)			
	3-ways proportional valve kit (4-pipe)							E4MPV03A6 (2 & 3 class) E4MPV06A6 (6 class) E4MPV10A6 (8 class)	E4MPV03A6 (1 up to 35 class) E4MPV06A6 (4 & 6 class) E4MPV10A6 (8 & 10 class)	E4MPV03A6 (2 & 3 class) E4MPV06A6 (6 class) E4MPV10A6 (8 class)
	2-ways proportional valve kit (cooling heat exchanger)					E2C2PV02A (2 up to 4 class) E2C2PV06A (6 up to 8 class)	E2C2PV02A (2 up to 4 class) E2C2PV06A (6 up to 8 class)	E2MPV207A6 (2, 3 & 6 class) E2MPV210A6 (8 class)	E2MPV207A6 (1 up to 6 class) E2MPV210A6 (8 & 10 class)	E2MPV207A6 (2, 3 & 6 class) E2MPV210A6 (8 class)
	2-ways proportional valve kit (additional heat exchanger)					E4C2PV02A (2 up to 4 class) E4C2PV06A (6 up to 8 class)	E4C2PV02A (2 up to 4 class) E4C2PV06A (6 up to 8 class)	E2MPV207A6	E2MPV207A6	E2MPV207A6
	2-ways proportional valve kit (4-pipe)									
Pressure independent controlled valves	Pressure independent controlled valves ON-OFF 230V (2-pipe)					E2C2PICV02A (2 up to 4 class) E2C2PICV06A (6 up to 8 class)	E2C2PICV02A (2 up to 4 class) E2C2PICV06A (6 up to 8 class)	FWZSVPIC2V15 (2 class) FWZSVPIC2V20 (3 & 6 class) FWZSVPIC2V25 (8 class)	FWZSVPIC2V15 (1 class) FWZSVPIC2V20 (15 up to 25 class) FWZSVPIC2V25 (3 up to 6 class) FWZSVPIC2V25 (8 up to 10 class)	FWZSVPIC2V15 (2 class) FWZSVPIC2V20 (3 & 6 class) FWZSVPIC2V25 (8 class)
	Pressure independent controlled valves ON-OFF 230V (4-pipe)					E4C2PICV02A (2 up to 4 class) E4C2PICV06A (6 up to 8 class)	E4C2PICV02A (2 up to 4 class) E4C2PICV06A (6 up to 8 class)	FWZSVPIC2V1515 (2 class) FWZSVPIC2V2015 (3 & 6 class) FWZSVPIC2V2520 (8 class)	FWZSVPIC2V1010 (1 class) FWZSVPIC2V1515 (15 up to 25 class) FWZSVPIC2V2015 (3 up to 6 class) FWZSVPIC2V2520 (8 up to 10 class)	FWZSVPIC2V1515 (2 class) FWZSVPIC2V2015 (3 & 6 class) FWZSVPIC2V2520 (8 class)
	Pressure independent controlled valves modulating 24V (2-pipe)					E2C2PRPICV02A (2 up to 4 class) E2C2PRPICV06A (6 up to 8 class)	E2C2PRPICV02A (2 up to 4 class) E2C2PRPICV06A (6 up to 8 class)			
	Pressure independent controlled valves modulating 24V (4-pipe)					E4C2PRPICV02A (2 up to 4 class) E4C2PRPICV06A (6 up to 8 class)	E4C2PRPICV02A (2 up to 4 class) E4C2PRPICV06A (6 up to 8 class)			
Adapters	Installation box/Mounting plate for adapter PCBs (when there is no space in the switchbox)	KRP1K98A	KRP1BD101							
	Remote ON/OFF		EKROROA							
	Remote sensor	KRCS01-4	KRCS01-1							
	Optional PCB for MODBUS connection	EKFCMBCB	EKFCMBCB							
	Wiring adapter with 4 output signals for valve control PCB	EKRP1C11	EKRP1C11							
	FWEDA PCB installation kit									
	Additional cable for 3rd party valve kit integration			EKER030A	EKER030A					
	Temperature sensor kit for wired remote controller			FWTSKA	FWTSKA	FWTSKA	FWTSKA	FWTSKA	FWTSKA	FWTSKA
	Relative humidity sensor kit for wired remote controller			FWHSKA	FWHSKA	FWHSKA	FWHSKA	FWHSKA	FWHSKA	FWHSKA
	Water temperature sensor for simplified controller			FWCSWA	FWCSWA	FWCSWA	FWCSWA	FWCSWA	FWCSWA	FWCSWA
	Fan stop thermostat								YFSTA6	
	Master-slave interface					EPIMSA6			EPIMSA6	
	Power interface									

	FWL-DAT/DAF	FWS-AT/AF	FWM-DAT/DAF	FWE-DT/DF	FWE-FT/FF	FWP-CT/CF	FWB-CT/CF	FWQ-AT/AF	FWD-AT/AF	FWN-AT/AF	FWT-HT
	E2MPV03A6 (1 up to 35 class) E2MPV06A6 (4 & 6 class) E2MPV10A6 (8 & 10 class)	E2MPV03A6 (2 & 3 class) E2MPV06A6 (6 class) E2MPV10A6 (8 class)	E2MPV03A6 (1 up to 35 class) E2MPV06A6 (4 & 6 class) E2MPV10A6 (8 & 10 class)	E4V2PN04V3DA (3 up to 5 class) E4V2PN06V3DA (6 up to 8 class) E4V2PN10V3DA (10 & 11 class)	EK02P3V24W5A (4 up to 10 class) EK04P3V24C5A (14 & 16 class) EK06P3V24C5A (20 & 24 class)	E4V2N05P24WA (4 & 5 class) E4V2N08P24WA (6 & 8 class) E2MPV10A6 (10 up to 17 class)	E4V2N05P24WA (4 & 5 class) E4V2N08P24WA (6 & 8 class) E2MPV10A6 (10 up to 17 class)				
						E4VHN08P24WA (4 up to 8 class) E4VHN17P24WA (10 up to 17 class)	E4VHN08P24WA (4 up to 8 class) E4VHN17P24WA (10 up to 17 class)				
	E4MPV03A6 (1 up to 35 class) E4MPV06A6 (4 & 6 class) E4MPV10A6 (8 & 10 class)	E4MPV03A6 (2 & 3 class) E4MPV06A6 (6 class) E4MPV10A6 (8 class)	E4MPV03A6 (1 up to 35 class) E4MPV06A6 (4 & 6 class) E4MPV10A6 (8 & 10 class)	E4V4PN04V3DA (3 up to 5 class) E4V4PN06V3DA (6 up to 8 class) E4V4PN10V3DA (10 & 11 class)	EK02P3V24W5A x2 (4 up to 10 class) EK04P3V24C5A x2 (14 & 16 class) EK06P3V24C5A x2 (20 & 24 class)	E4V2N05P24WA + E4VHN08P24WA (4 & 5 class) E4V2N08P24WA + E4VHN08P24WA (6 & 8 class) E2MPV10A6 + E4VHN17P24WA (10 up to 17 class)	E4V2N05P24WA + E4VHN08P24WA (4 & 5 class) E4V2N08P24WA + E4VHN08P24WA (6 & 8 class) E2MPV10A6 + E4VHN17P24WA (10 up to 17 class)				
	E2MPV207A6 (1 up to 6 class) E2MPV210A6 (8 & 10 class)	E2MPV207A6 (2, 3 & 6 class) E2MPV210A6 (8 class)	E2MPV207A6 (1 up to 6 class) E2MPV210A6 (8 & 10 class)			E2MPV207A6 (4 up to 8 class) E2MPV210A6 (10 up to 17 class)	E2MPV207A6 (4 up to 8 class) E2MPV210A6 (10 up to 17 class)				
	E2MPV207A6	E2MPV207A6	E2MPV207A6			E2MPV207A6	E2MPV207A6				
						E2MPV207A6 + E2MPV207A6 (4 up to 8 class) E2MPV210A6 + E2MPV207A6 (10 up to 17 class)	E2MPV207A6 + E2MPV207A6 (4 up to 8 class) E2MPV210A6 + E2MPV207A6 (10 up to 17 class)				
	FWZSVPIC2V15 (1 class) FWZSVPIC2V20 (15 up to 25 class) FWZSVPIC2V25 (3 up to 6 class) FWZSVPIC2V25 (8 up to 10 class)	FWZSVPIC2V15 (2 class) FWZSVPIC2V20 (3 & 6 class) FWZSVPIC2V25 (8 class)	FWZSVPIC2V15 (1 class) FWZSVPIC2V20 (15 up to 25 class) FWZSVPIC2V25 (3 up to 6 class) FWZSVPIC2V25 (8 up to 10 class)			FWBPVPIC2V15 (4 & 6 class) FWBPVPIC2V20A (8 class) FWBPVPIC2V20B (10 class) FWBPVPIC2V25 (11 up to 17 class)	FWBPVPIC2V15 (4 & 6 class) FWBPVPIC2V20 (8 & 10 class) FWBPVPIC2V25 (11 up to 17 class)		FWDNVPIC2V20 (4 & 6 class) FWDNVPIC2V25 (8 & 10 class) FWDNVPIC2V32 (12 up to 18 class)	FWDNVPIC2V20 (4 up to 7 class) FWDNVPIC2V25 (8 & 10 class) FWDNVPIC2V32 (12 up to 18 class)	
	FWZSVPIC2V1010 (1 class) FWZSVPIC2V1515 (15 up to 25 class) FWZSVPIC2V2015 (3 up to 6 class) FWZSVPIC2V2520 (8 up to 10 class)	FWZSVPIC2V1515 (2 class) FWZSVPIC2V2015 (3 & 6 class) FWZSVPIC2V2520 (8 class)	FWZSVPIC2V1010 (1 class) FWZSVPIC2V1515 (15 up to 25 class) FWZSVPIC2V2015 (3 up to 6 class) FWZSVPIC2V2520 (8 up to 10 class)			FWBPVPIC2V1015 (4 & 5 class) FWBPVPIC2V1515 (6 class) FWBPVPIC2V2015A (8 class) FWBPVPIC2V2015A (10 class) FWBPVPIC2V2515 (11 up to 17 class)	FWBPVPIC2V1015 (4 & 5 class) FWBPVPIC2V1515 (6 class) FWBPVPIC2V2015A (8 class) FWBPVPIC2V2015A (10 class) FWBPVPIC2V2515 (11 up to 17 class)		FWDNVPIC2V2015 (4 & 6 class) FWDNVPIC2V2520 (8 & 10 class) FWDNVPIC2V3220 (12 class) FWDNVPIC2V3225 (16 to 18 class)	FWDNVPIC2V2015 (4 & 6 class) FWDNVPIC2V2520 (8 & 10 class) FWDNVPIC2V3220 (12 class) FWDNVPIC2V3225 (16 to 18 class)	
											FCBAG
								EKC01Q5A			
					EKER015A						
	FWTSKA	FWTSKA	FWTSKA	FWTSKA	FWTSKA	FWTSKA	FWTSKA	FWTSKA	FWTSKA	FWTSKA	
	FWHSKA	FWHSKA	FWHSKA	FWHSKA	FWHSKA	FWHSKA	FWHSKA	FWHSKA	FWHSKA	FWHSKA	
	FWCSWA	FWCSWA	FWCSWA	FWCSWA	FWCSWA	FWCSWA	FWCSWA	FWCSWA	FWCSWA	FWCSWA	
	YFSTA6		YFSTA6				YFSTA6		YFSTA6		
	EPIMSA6		EPIMSA6	EPIMSA6	EPIMSA6		EPIMSA6		EPIMSA6		
									EPIB6 (only 16 & 18 class)		

	Indoor units	FWC-BT/BF	FWF-BT/BF	FWF-DT/DF	FWC-DT/DF	FWH-AT/AF	FWI-AT/AF	FWZ-AT/AF	FWV-DAT/DAF	FWR-AT/AF
Others	Fresh air intake kit (direct installation type)		KDDQ44XA60	KDDQ44XA60						
	Fresh air intake	KDDP55C160-1 + KDDP55D160-2			KDDP55C160-1 + KDDP55D160-2			EFA02A6 (2 class) EFA03A6 (3 class) EFA06A6 (6 class) EFA10A6 (8 class)	EFA02A6 (1, 15 & 2 class) EFA03A6 (25 & 3 class) EFA06A6 (35, 4 & 6 class) EFA10A6 (8 & 10 class)	
	Long-life filter		KAFQ441BA60	KAFQ441BA60	KAF5511D160					
	High efficiency filter				BAF552AA160					
	Electric heater (standard)							EEH02A6 (2 class) EEH03A6 (3 class) EEH06A6 (6 class) EEH10A6 (8 class)	EEH01A6 (1 class) EEH02A6 (15 & 2 class) EEH03A6 (25 & 3 class) EEH06A6 (35, 4 & 6 class) EEH10A6 (8 & 10 class)	EEH02A6 (2 class) EEH03A6 (3 class) EEH06A6 (6 class) EEH10A6 (8 class)
	Electric heater (big)									
	Additional heat exchanger							ESRH02A6 (2 class) ESRH03A6 (3 class) ESRH06A6 (6 class) ESRH10A6 (8 class)	ESRH02A6 (1, 15 & 2 class) ESRH03A6 (25 & 3 class) ESRH06A6 (35, 4 & 6 class) ESRH10A6 (8 & 10 class)	ESRH02A6 (2 class) ESRH03A6 (3 class) ESRH06A6 (6 class) ESRH10A6 (8 class)
	Supporting feet							ESFV06A6 (2, 3 & 6 class) ESFV10A6 (8 class)	ESFV06A6 (1 up to 6 class) ESFV10A6 (8 & 10 class)	
	Supporting feet and grille							ESFVG02A6 (2 class) ESFVG03A6 (3 class) ESFVG06A6 (6 class) ESFVG10A6 (8 class)	ESFVG02A6 (1, 15 & 2 class) ESFVG03A6 (25 & 3 class) ESFVG06A6 (35, 4 & 6 class) ESFVG10A6 (8 & 10 class)	
	Front air intake kit									
	Plenum box with rectangular connections									
	Plenum box with rectangular connections (supply side)									
	Plenum box with rectangular connections (intake side)									

	FWL-DAT/DAF	FWS-AT/AF	FWM-DAT/DAF	FWE-DT/DF	FWE-FT/FF	FWP-CT/CF	FWB-CT/CF	FWQ-AT/AF	FWD-AT/AF	FWN-AT/AF	FWT-HT
									EDMFA04A6 (4 class) EDMFA06A6 (6 class) EDMFA10A6 (8 & 10 class) EDMFA12A6 (12 class) EDMFA18A6 (16 & 18 class)	EDMFA04A6 (4 & 5 class) EDMFA06A6 (6 & 7 class) EDMFA10A6 (8 & 10 class)	
	EEH01A6 (1 class) EEH02A6 (15 & 2 class) EEH03A6 (25 & 3 class) EEH06A6 (35, 4 & 6 class) EEH10A6 (8 & 10 class)	EEH02A6 (2 class) EEH03A6 (3 class) EEH06A6 (6 class) EEH10A6 (8 class)	EEH01A6 (1 class) EEH02A6 (15 & 2 class) EEH03A6 (25 & 3 class) EEH06A6 (35, 4 & 6 class) EEH10A6 (8 & 10 class)			EH060V3A (4 & 5 class) EH100V36A (6 & 8 class) EH200V36A (10 up to 17 class)	EH060V3A (4 & 5 class) EH100V36A (6 & 8 class) EH200V36A (10 up to 17 class)		EDEH04A6 (4 class) EDEHS06B6 (6 class) EDEHS10B6 (8 & 10 class) EDEHS12B6 (12 class) EDEHS18B6 (16 & 18 class)	EDEH04A6 (4 & 5 class) EDEHS06B6 (6 & 7 class) EDEHS10B6 (8 & 10 class)	
									EDEH04A6 (4 class) EDEHB06A6 (6 class) EDEHB10A6 (8 & 10 class) EDEHB12A6 (12 class) EDEHB18A6 (16 & 18 class)	EDEH04A6 (4 & 5 class) EDEHB06A6 (6 & 7 class) EDEHB10A6 (8 & 10 class)	
	ESRH02A6 (1, 15 & 2 class) ESRH03A6 (25 & 3 class) ESRH06A6 (35, 4 & 6 class) ESRH10A6 (8 & 10 class)	ESRH02A6 (2 class) ESRH03A6 (3 class) ESRH06A6 (6 class) ESRH10A6 (8 class)	ESRH02A6 (1, 15 & 2 class) ESRH03A6 (25 & 3 class) ESRH06A6 (35, 4 & 6 class) ESRH10A6 (8 & 10 class)			EAHD04A (4 & 5 class) EAHD06A (6 & 8 class) EAHD10A (10 up to 17 class)	EAHD04A (4 & 5 class) EAHD06A (6 & 8 class) EAHD10A (10 up to 17 class)				
		ESFV06A6 (2, 3 & 6 class) ESFV10A6 (8 class)	ESFV06A6 (1 up to 6 class) ESFV10A6 (8 & 10 class)	ESFH01D5 (installation leg for vertical application)							
		CONV02A6 (2 class) CONV03A6 (3 class) CONV06A6 (6 class) CONV10A6 (8 class)	CONV02A6 (1, 15 & 2 class) CONV03A6 (25 & 3 class) CONV06A6 (35, 4 & 6 class) CONV10A6 (8 & 10 class)			EDFAI04A (4 & 5 class) EDFAI06A (6 & 8 class) EDFAI10A (10 up to 17 class)	EDFAI04A (4 & 5 class) EDFAI06A (6 & 8 class) EDFAI10A (10 up to 17 class)				
									PRD04A6 (4 class) PRD06A6 (6 class) PRD08A6 (8 & 10 class) PRD12A6 (12 class) PRD16A6 (16 & 18 class)	PRD04A6 (4 & 5 class) PRD06A6 (6 & 7 class) PRD08A6 (8 & 10 class)	
		EPOR02A6 (2 class) EPOR03A6 (3 class) EPOR06A6 (6 class) EPOR10A6 (8 class)	EPOR02A6 (2 class) EPOR03A6 (3 class) EPOR06A6 (6 class) EPOR10A6 (8 class)								
		EPIR02A6 (2 class) EPIR03A6 (3 class) EPIR06A6 (6 class) EPIR10A6 (8 class)	EPIR02A6 (2 class) EPIR03A6 (3 class) EPIR06A6 (6 class) EPIR10A6 (8 class)								

	Indoor units	FWC-BT/BF	FWF-BT/BF	FWF-DT/DF	FWC-DT/DF	FWH-AT/AF	FWI-AT/AF	FWZ-AT/AF	FWV-DAT/DAF	FWR-AT/AF
Others	Plenum box with circular connections									
	Plenum box (not insulated) with circular connections (supply side)									
	Plenum box (insulated) with circular connections (supply side)									
	Plenum box (insulated) with circular connections (intake side)									
	Cover box for electric connections									
	G2 Filter									
	G3 Filter									
	G4 Filter									
	Additional drain pan			EDT02D5A	EDT03D5A					
	Vertical auxiliary drain pan					included	included	EDPVB6	EDPVB6	EDPVB6
	Horizontal auxiliary drain pan							EDPHB6	EDPHB6	EDPHB6
	Drain pump	included	included	included	included	included	included	CDRP1A	CDRP1A	CDRP1A (only vertical installation)
	Vertical installation kit (Wall Mounted)									

	FWL-DAT/DAF	FWS-AT/AF	FWM-DAT/DAF	FWE-DT/DF	FWE-FT/FF	FWP-CT/CF	FWB-CT/CF	FWQ-AT/AF	FWD-AT/AF	FWN-AT/AF	FWT-HT
									PCIC04A6 (4 class) PCIC06A6 (6 class) PCIC08A6 (8 & 10 class) PCIC12A6 (12 class) PCIC16A6 (16 & 18 class)	PCIC04A6 (4 & 5 class) PCIC06A6 (6 & 7 class) PCIC08A6 (8 & 10 class)	
						PLT1NAA (4 & 5 class) PLT2NAA (6 & 8 class) PLT3NAA (10 up to 17 class)	PLT1NAA (4 & 5 class) PLT2NAA (6 & 8 class) PLT3NAA (10 up to 17 class)				
		EPCC02A6 (2 class) EPCC03A6 (3 class) EPCC06A6 (6 class) EPCC10A6 (8 class)	EPCC02A6 (1, 15 & 2 class) EPCC03A6 (25 & 3 class) EPCC06A6 (35, 4 & 6 class) EPCC10A6 (8 & 10 class)			PLT1CAA (4 & 5 class) PLT2CAA (6 & 8 class) PLT3CAA (10 up to 17 class)	PLT1CAA (4 & 5 class) PLT2CAA (6 & 8 class) PLT3CAA (10 up to 17 class)				
		EICC02A6 (2 class) EICC03A6 (3 class) EICC06A6 (6 class) EICC10A6 (8 class)	EICC02A6 (1, 15 & 2 class) EICC03A6 (25 & 3 class) EICC06A6 (35, 4 & 6 class) EICC10A6 (8 & 10 class)			FWS08BOXA	FWS08BOXA		FWS08BOXA (up to 7 class + 12) FWD18BOXA (8, 10, 16, 18 class)	FWS08BOXA (up to 7 class + 12) FWD18BOXA (8, 10, 16, 18 class)	
		FWS08BOXA	FWS08BOXA								
					EKAF02G5A (4 up to 6 class) EKAF03G5A (8 up to 12 class) EKAF02G5A x 2 (14 up to 16 class) EKAF02G5A + EKAF03G5A (20 up to 24 class)						
								EKAF06G3PQ5A (04 to 05 class) EKAF08G3PQ5A (07 class) EKAF11G3PQ5A (09 to 14 class) EKAF15G3PQ5A (17 to 25 class)			
						FG4T1AA (4 & 5 class) FG4T2AA (6 & 8 class) FG4T3AA (10 up to 17 class)	FG4T1AA (4 & 5 class) FG4T2AA (6 & 8 class) FG4T3AA (10 up to 17 class)	EKAF06G4PQ5A (04 to 05 class) EKAF08G4PQ5A (07 class) EKAF11G4PQ5A (09 to 14 class) EKAF15G4PQ5A (17 to 25 class)	FSDG404A (4 class) FSDG406A (6 class) FSDG408A (8 & 10 class) FSDG412A (12 class) FSDG416A (16 & 18 class)	FSDG404A (4 & 5 class) FSDG406A (6 & 7 class) FSDG408A (8 & 10 class)	
								Included			
	EDPVB6	EDPVB6	EDPVB6	ESFD01D6					EDDPV10A6 (4, 6, 8, 10 class) EDDPV18A6 (12, 16 & 18 class)	EDDPV10A6	
	EDPHB6	EDPHB6	EDPHB6		included	EDPD7 (4 up to 8 class) EDPD9 (10 up to 17 class)	EDPD7 (4 up to 8 class) EDPD9 (10 up to 17 class)		EDDPH10A6 (4, 6, 8, 10 class) EDDPH18A6 (12, 16 & 18 class)	EDDPH10A6	
	CDRP1A (only vertical installation)	CDRP1A	CDRP1A			CDRP1A	CDRP1A	Included	CDRP1A	CDRP1A	
				ESFH02D5							

Daikin Europe N.V. Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Publisher)

11/25 ECPEN26-403

Daikin Europe N.V participates in the Eurovent Certified Performance programme for Fan Coil Units and Variable Refrigerant Flow systems.

Daikin Applied Europe S.p.A participates in the Eurovent Certified Performance programme for Liquid Chilling Packages, Hydronic Heat Pumps and Air Handling Units.

Check ongoing validity of certificate: www.eurovent-certification.com

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.